

BUYLOG SECTION 2

Modular Metering



Table of contents

Modular Metering Family Overview	2-4
Mini Mod III	2-5
Meter Mod III	2-9
Single socket metering	2-23
Horizontal metering	2-29
Modular metering circuit breakers	2-33
Modular metering factory installed accessories	2-37
Modular metering field installed accessories	2-42

Overview



		Mini Mod III	Meter Mod III	Single socket metering	Horizontal metering
Application		Multi family	Multi family	Single family/ commercial/ light industrial	Multi-family
Phases	Single	■	■	■	■
	Three		■	■	
No of Sockets		Up to 6	no limit	1	Up to 6
Expandable		No	Yes	No	No
Amperage range		200-600	400-2000	Up to 320	Up to 200
Voltage		240 V	240 V	600 V	600 V
Interrupting circuit rating @ 240 VAC		Up to 100kA	Up to 100kA		
Construction	Indoor/outdoor NEMA 3R	■	■		
Socket Types	Ring	■	■	■	■
	Ringless	■	■	■	■
	Ringless with Horn by-pass	■	■	■	■
	Ringless with lever by-pass		■	■	■
Starting page		2-5	2-9	2-23	2-29

Accessories


By-pass kits	■			
Semi-flush kits	■			
Fifth jaw kits	■		■	■
Compression lug landing kit	■			
Connecting hubs			■	■
Cover plates			■	■

Mini Mod III

Table of contents

Mini Mod III	
Product overview	2-6
Ordering code construction	2-6
Ring-type socket (4 jaw socket standard)	2-7
Ringless socket (5th jaw socket standard)	2-7
Ring-type socket, MEG approved, (4) jaw socket standard	2-8
Ringless socket, MEG approved, 5th jaw socket standard	2-8

Product overview

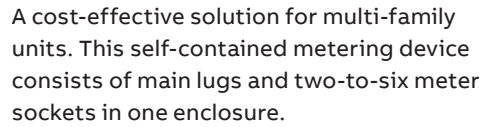

- UL listed (Panelboards No. 67)
- Indoor/outdoor construction
- Ring-type and ringless meter sockets
- Bondable neutral, strap included
- 11-inch mounting Z rail included
- Swing away mounting feet factory installed
- Underground, incoming feed only

	T	MM	6	6	20	R	F
ABB identification							Additional features F = MEG approval HB = Horned bypass (ringless only)
Type							
MM = Mini Mod ring type							
MMR = Mini Mod ringless							
Horizontal bus rating							
2 = 200A							
4 = 400A							
6 = 600A							
					Socket rating 12 = 125A 20 = 200A	Enclosures R = Type 3R rainproof	
				Socket positions 1-6			

Mini Mod III



Single-phase ring type

Ring-type socket (4 jaw socket standard)

Socket amps	No. of sockets	Main ampere rating	Main wire size AWG/kcmil Cu/Al - phase	Service ground	Equipment ground	Ordering code
125	2	200	(1) 6-300	6-2/0	14-4	TMM2212R ²
	3	400	(1) 6-600 or (2) 2/0-250	4-300		TMM4312R
	4	400				TMM4412R
	5	600	(2) 250-500			TMM6512R
	6	600				TMM6612R
200	2	400	(2) 250-500	6-2/0	14-4	TMM4220R
	3	600		4-300		TMM6320R
	4	600				TMM6420R
	5	600				TMM6520R
	6	600				TMM6620R



Single-phase ringless

Ringless socket (5th jaw socket standard)

Socket amps	No. of sockets	Main ampere rating	Main wire size AWG/kcmil Cu/Al - phase	Service ground	Equipment ground	Ordering code	
							Horned bypass factory installed
125	2	200	(1) 6-300	6-2/0	14-4	TMMR2212R²	TMMR2212RHB²
	3	400	(1) 6-600 or (2) 2/0-250	4-300		TMMR4312R	TMMR4312RHB
	4	400	TMMR4412R			TMMR4412RHB	
	5	600	(2) 250-500			TMMR6512R	TMMR6512RHB
	6	600	TMMR6612R			TMMR6612RHB	
200	2	400	(2) 250-500	6-2/0	14-4	TMMR4220R	TMMR4220RHB
	3	600		4-300		TMMR6320R	TMMR6320RHB
	4	600				TMMR6420R	TMMR6420RHB
	5	600				TMMR6520R	TMMR6520RHB
	6	600				TMMR6620R	TMMR6620RHB

¹ One snap-type, aluminum sealing ring (TSR5) per socket included

² May be fed from overhead. Use hub TC300.

Mini Mod III

Ring-type socket, MEG approved, (4) jaw socket standard¹

Socket amps	No. of sockets	Main ampere rating	Main wire size AWG/kcmil Cu/Al - phase	Service ground	Equipment ground	Ordering code
						Ring-type socket ¹ (4 jaw socket standard)
125	2	200	(1) 6-300	6-2/0	14-4	TMM2212RF ²
	3	400	(1) 6-600 or (2) 2/0-250	4-300		TMM4312RF
	4	400	TMM4412RF			
	5	600	(2) 250-500			TMM6512RF
	6	600	TMM6612RF			
200	2	400	(2) 250-500	6-2/0	14-4	Use TMM6320R
	3	600		4-300		TMM6320RF
	4	600		TMM6420RF		
	5	600		Use Ringless or Meter Mod III		
	6	600		Use Ringless or Meter Mod III		

Ringless socket, MEG approved, 5th jaw socket standard

Socket amps	No. of sockets	Main ampere rating	Main wire size AWG/kcmil Cu/Al - phase	Service ground	Equipment ground	Ordering code
						Ringless socket (5th jaw socket standard)
125	2	200	(1) 6-300	6-2/0	14-4	TMMR2212RF ²
	3	400	(1) 6-600 or (2) 2/0-250	4-300		TMMR4312RF
	4	400	TMMR4412RF			
	5	600	(2) 250-500			TMMR6512RF
	6	600	TMMR6612RF			
200	2	400	(2) 250-500	6-2/0	14-4	TMMR4220RF
	3	600		4-300		TMMR6320RF
	4	600		TMMR6420RF		
	5	600		TMMR6520RF		
	6	600		TMMR6620RF		

NOTE: These MEG approved units have an added cotter pin that eliminates failure of the metering stabs when the meter is plugged into the meter base.

¹One snap-type, aluminum sealing ring (TSR5) per socket included.

²May be fed from overhead. Use hub TC300.

Meter Mod III

Table of contents

Meter Mod III	
Product overview	2-10
Ordering code construction	2-10
Main modules	
Main breaker modules	2-11
Main breaker modules with integrated pull box	2-13
Main fusible switch modules	2-14
Main fusible switch modules with integrated pull box	2-15
Main lug modules	2-16
Main pull box modules	2-17
Meter stack modules, residential	
Product overview	2-18
Ordering code construction	2-18
Single phase	2-19
Single phase, MEG approved	2-20
Meter stack modules, commercial	
Product overview	2-21
Ordering code construction	2-21
Single phase	2-22
Three phase	2-22

Meter Mod III

Product overview



When greater than six branch circuits are required, the NEC requires a main disconnect and overcurrent protection device ahead of the meters. A main breaker module serves as this single point of disconnect and overcurrent protection. A main breaker module consists of a of a main breaker, bussing and connectors to allow meter modules to be added to the left and/or the right of the unit.

Features

- Main breaker modules include UL489, 80% rated circuit breakers.
- Main fusible switch modules include a UL98 disconnect switch, fuses not included.
- Main fusible switch with integrated pull box meets EUSERIC requirements, accept class T fuses, and lugs are not included.
- Single-phase mains have a neutral, A-phase, B-phase and ground and may be connected to three-phase horizontal bus stacks. However, output is only single-phase.
- All mains are required to be center feed only when main breaker is greater than horizontal bus amps
- Short circuit ratings through 100,000 amps RMS symmetrical
- Interchangeable single and three-phase main and meter modules
- Indoor/outdoor construction
- Individual meter covers

Ordering code construction - Meter Mod III

T	MP	3	SB	8	R	AR
ABB identification						Additional Features
						AR = Arc reduction (main breaker only)
						CRIS = Copper, riser (main lug only)
						CLL = Compression lug landing kit included
						ST = Shunt trip, factory installed
Type						
MP = Meter Mod III						
Insert for 3-phase						
						Enclosures
						R = Type 3R Rainproof
Type						
SB = Main breaker, top/bottom feed (400-1200A)						
SHB = Main breaker, high interrupting, top/bottom feed (400-1200A)						
BB = Main breaker, bottom feed (1400-2000A)						
BT = Main breaker, top feed (1400-2000A)						
BU = Main breaker with integral pull box - EUSERC						
FT = Main switch, top feed						
FB = Main switch, bottom feed						
L = Main lug						
U = Main pull box						
						Maximum Ampere Rating
						4 = 400A
						6 = 600A
						8 = 800A
						10 = 1000A
						12 = 1200A
						14 = 1400A
						16 = 1600A
						20 = 2000A

Meter Mod III

Main breaker module, single-phase, 3 wire 120/240 Vac

Main ampere rating	Interrupting current rating (kAIC)	Feed location	110-240 Vac shunt trip	Main breaker frame	Main wire size AWG/kcmil Cu/Al - phase	Main wire size AWG/kcmil Cu/ Al - neutral	Ordering code
400	65	Bottom	No	SGH400	Al: (2) 2/0-500 or (1) 6-600 Cu: 2/0-400 or (1) 6-600	(2) 2 -600	TMPSB4R
	100						TMPSHB4R
800	65	Bottom	No	SKH800	Al/Cu (3) 3/0-500 ¹	(4) 250-500 ²	TMPSB8R
1000	65	Bottom	No	SKH1200	Al: (4) 250-500 Cu: (4) 250-500 ¹	(4) 250-500 ²	TMPSB10R
1200	65	Bottom	No	SKH1200	Al: (4) 250-500 Cu: (4) 250-500 ¹	(4) 250-500 ²	TMPSB12R
1400	100	Bottom	No	RG	(4) 500-1000 kcmil	(4) 250-500	TMPBB14R ³
1600	100	Bottom	No	RG	Al/Cu (4) 500-1000 kcmil	Al/Cu (4) 500-1000	TMPBB16R ³
		Bottom	Yes				TMPBB16RST ³
		Top	No				TMPBT16R ³
		Top	Yes				TMPBT16RST ³
2000	100	Top	No	RG	(6) #2-600 kcmil	(6) #2-600 kcmil	TMPBT20R ³
		Bottom	No				TMPBB20R ³

Main breaker module, single-phase, 3 wire 120/240 Vac with arc reduction means

Main ampere rating	Interrupting current rating (kAIC)	Feed location	110-240 Vac shunt trip	Description	Main wire size AWG/kcmil Cu/Al - phase	Main wire size AWG/kcmil Cu/Al - neutral	Ordering code
400A to less than 1200A	–	Top or bottom	No	–	–	–	Use standard product #. code effects only 1200A and greater
1200A	100	Bottom	No	1200A 1Ph main breaker bottom feed - arc reduction	(4) 500-1000	(4) 250-500	TMPBB12RAR
1400A	100	Bottom	No	1400A 1Ph main breaker bottom feed - arc reduction	(4) 500-1000	(4) 250-500	TMPBB14RAR
			Yes				TMPBB14RARST
		Top	Yes	1400A 1Ph main breaker top feed - arc reduction			TMPBT14RARST
1600A	100	Bottom	No	1600A 1Ph main breaker bottom feed - arc reduction	(4) 500-1000	(4) 500-1000	TMPBB16RAR
		Top	No	1600A 1Ph main breaker top feed - arc reduction			TMPBT16RAR
			Yes				TMPBT16RARST
2000A	100	Bottom	No	2000A 1Ph main breaker bottom feed - arc reduction	(6) #2-600	(6) #2-600	TMPBB20RAR

NOTE: The 600A single-phase standard MCB module is no longer available. Please see the fusible switch module alternatives on page 2-21, or EUSERC main breaker module alternatives on page 2-19. These are still available, subject to local approval.

¹Optional lug TCAL124 field installed wire range (3) 300-750 kcmil.

²Optional neutral lug field installed wire range (3) 1/0-750 kcmil. Lug kit product number TMPL750.

³Fixed rating plug not field adjustable.

Meter Mod III

Main breaker module, three-phase, 4 wire 208Y/120 Vac or three-phase, 4 wire, 120/240V delta hi-leg

Main ampere rating	Interrupting current rating (kAIC)	Feed location	110-240 Vac shunt trip	Main breaker frame	Main wire size AWG/kcmil Cu/Al - phase	Main wire size AWG/ kcmil Cu/Al - neutral	Ordering code
400	65	Bottom	No	SGH400	Al: (2) 2/0-500 or (1) 6-600 Cu: 2/0-400 or (1) 6-600	(2) 2-600	TMP3SB4R
	100						TMP3SHB4R
600	65	Bottom	No	SGH600	Al: (2) 2/0-500 or (1) 6-600 Cu: 2/0-400 or (1) 6-600	(2) 2-600	TMP3SB6R
800	65	Bottom	No	SKH800	Al/Cu (3) 3/0-500 ¹	(4) 250-500 ²	TMP3SB8R
1000	65	Bottom	No	SKH1200	Al: (4) 250-500 Cu: (4) 250-500 ¹	(4) 250-500 ²	TMP3SB10R
1200	65	Bottom	No	SKH1200	Al: (4) 250-500 Cu: (4) 250-500 ¹	(4) 250-500 ²	TMP3SB12R
1400	100	Bottom	No	RG	(4) 500-1000 kcmil	(4) 500-1000	TMP3BB14R ³
		Top					TMP3BT14R ³
1600	100	Bottom	No	RG	Al/Cu (4) 500-1000	Al/Cu (4) 500-1000	TMP3BB16R ³
			No	RG	Compression lugs	Compression lugs	TMP3BB16RCLL ³
			Yes	RG	Al/Cu (4) 500-1000	Al/Cu (4) 500-1000	TMP3BB16RST ³
		Top	No				TMP3BT16R ³
			Yes				TMP3BT16RST ³
2000	100	Top	No	RG	(6) #2 – 600 kcmil	(6) #2–600 kcmil	TMP3BT20R ³
		Bottom					TMP3BB20R ³
		Bottom	Yes	RG	Compression lugs	Compression lugs	TMP3BB20RCLL ³
		Bottom					
		Bottom					TMP3BB20RST ³

Main breaker module, three-phase, 4 wire 208Y/120 Vac or three-phase, 4 wire, 120/240V delta hi-leg with arc reduction means⁴

Main ampere rating	Interrupting current rating (kAIC)	Feed location	110-240 Vac shunt trip	Description	Main wire size AWG/kcmil Cu/Al -phase	Main wire size AWG/kcmil Cu/Al -phase	Ordering code
400A to less than 1200A	–	Top or Bottom	No	–	–	–	Use standard product number. Code effects only 1200A and greater
1200A	100	Bottom	No	1200A 3Ph main breaker bottom feed - arc reduction	(4) 500-1000	(4) 500-1000	TMP3BB12RAR
			Yes				TMP3BB12RARST
		Top	No	1200A 3Ph main breaker top feed - arc reduction			TMP3BT12RAR
			Yes				TMP3BT12RARST
1400A	100	Bottom	No	1400A 3Ph main breaker bottom feed - arc reduction	(4) 500-1000	(4) 500-1000	TMP3BB14RAR
			Yes				TMP3BB14RARST
		Top	No	1400A 3Ph main breaker top feed - arc reduction			TMP3BT14RAR
1600A	100	Bottom	No	1600A 3Ph main breaker bottom feed - arc reduction	(4) 500-1000	(4) 500-1000	TMP3BB16RAR
			Yes				TMP3BB16RARST
		Top	No	1600A 3Ph main breaker top feed - arc reduction			TMP3BT16RAR
2000A	100	Bottom	No	2000A 3Ph main breaker bottom feed - arc reduction	(6) #2-600	(6) #2-600	TMP3BB20RAR
			Yes				TMP3BB20RARST
		Top	No	2000A 3Ph main breaker top feed - arc reduction			TMP3BT20RAR

¹Optional lug TCAL124 field installed wire range (3) 300-750 kcmil.

²Optional neutral lug field installed wire range (3) 1/0-750 kcmil. Lug kit product number TMPL750.

³Fixed rating plug not field adjustable.

⁴The main breaker in this section has an arc reduction means that satisfies the requirement of NEC 2014 Section 240.87

Meter Mod III

Main breaker module with integral pull box single-phase- EUSERC unit

	Interrupting current rating (kAIC)					
Main ampere rating		Feed location	Main frame type	Line/main lug size	Line/main neutral size	Ordering code
400	65	Top / bottom	KD	Landing pads only ¹	Landing pads only ¹	TMPBU4R ²
600			LD			TMPBU6R ²
800			MDL			TMPBU8R ²
1000			NGS			TMPBU10R ²
1200						TMPBU12R ²

Main breaker module with integral pull box three-phase- EUSERC unit

	Interrupting current rating (kAIC)					
Main ampere rating		Feed location	Main frame type	Line/main lug size	Line/main neutral size	Ordering code
400	65	Top / bottom	KD	Landing pads only ¹	Landing pads only ¹	TMP3BU4R ²
600			LD			TMP3BU6R ²
800			MDL			TMP3BU8R ²
1000			NGS			TMP3BU10R ²
1200						TMP3BU12R ²

NOTES: For EUSERC applications please check with local utility requirements to make sure the pull box meets their dimensional requirements. Some applications may require you to use a Commercial Metering Switchboard.

¹Landing pads with 1/2" bolts per EUSERC drawing number 347 provided.
Contractor will need to supply crimp/compression lugs.

²Fixed rating plug not field adjustable.

Meter Mod III

Main fusible switch module, single-phase, 3 wire 120/240 Vac

Main ampere rating	Interrupting current rating (kAIC)	Wire entry	Main wire size AWG/kcmil Cu/Al -phase	Main wire size AWG/kcmil Cu/Al - neutral	Stud sets per phase and neutral	Fuse not included. Order separately.	Compression lug landing kit	Ordering code
400	100	Top	(1) 1/0-750 or (2) 1/0-300	(1) 1/0-750 or (2) 1/0-300	1	Class T only	Order separately	TMPFT4R
600			(2) 2-600	(2) 2-600				TMPFT6R
800			(4) 3/0-750	(4) 3/0-750				TMPFT8R
1200			(4) 2-500	(4) 2-500	–	Class L only. Bolted pressure switch	–	TMPFT12R
400	100	Bottom	(1) 1/0-750 or (2) 1/0-300	(1) 1/0-750 or (2) 1/0-300	1	Class T only	Order separately	TMPFB4R
600			(2) 2-600	(2) 2-600				TMPFB6R
800			(4) 3/0-750	(4) 3/0-750				TMPFB8R
1200	100	Bottom	(4) 2-500	(4) 2-500	–	see footnote 1	–	TMPFB12RT ¹
						see footnote 2		TMPFB12R ²

Main fusible switch module, three-phase, 4 wire 208Y/120 Vac

Main ampere rating	Interrupting current rating (kAIC)	Wire entry	Main wire size AWG/kcmil Cu/Al -phase	Main wire size AWG/kcmil Cu/Al - neutral	Stud sets per phase and neutral	Fuse not included. Order separately.	Compression lug landing kit	Ordering code
400	100	Top	(1) 1/0-750 or (2) 1/0-300	(1) 1/0-750 or (2) 1/0-300	1	Class T only	TMP3F8CLL1 Order separately	TMP3FT4R
600			(2) 2-600	(2) 2-600				TMP3FT6R
800			(4) 3/0-750	(4) 3/0-750				TMP3FT8R
1200			(4) 4-600	(4) 4-600	–	Class L only. Bolted pressure switch	–	TMP3FT12R
1600			(6) 4-600	(6) 4-600	–		–	TMP3FT16R
2000			(8) 4-600	(8) 4-600	–		–	TMP3FT20R
400	100	Bottom	(1) 1/0-750 or (2) 1/0-300	(1) 1/0-750 or (2) 1/0-300	1	Class T only	TMP3F8CLL1 Order separately	TMP3FB4R
600			(2) 2-600	(2) 2-600				TMP3FB6R
800			(4) 3/0-750	(4) 3/0-750				TMP3FB8R
1200			(4) 4-600	(4) 4-600	–	See footnote 4	–	TMP3FB12R ⁴
1200			(4) 2-600	(4) 2-600	–	See footnote 3	–	TMP3FB12RT ³
1600			(6) 4-600	(6) 4-600	–	Class L only. Bolted pressure switch	–	TMP3FB16R
1600			(6) 4-600	(6) 4-600	–		–	TMP3FB16RST ⁵
2000			(8) 4-600	(8) 4-600	–		–	TMP3FB20R
2000			(8) 4-600	(8) 4-600	–		–	TMP3FB20RST ⁵

¹TMPFB12RT is a standard fusible switch that uses only Class T fuses. This unit is less robust and smaller than the TMPFB12R, but is significantly less expensive.

²TMP3FB12R is a bolted pressure switch that uses only Class L fuses. This unit is larger and more robust than the TMP3FB12RT, but more expensive.

³TMP3FB12RT is a standard fusible switch that uses only Class T fuses. This unit is less robust and smaller than the TMP3FB12R, but is significantly less expensive.

⁴TMP3FB12R is a bolted pressure switch that uses only Class L fuses. This unit is larger and more robust than the TMP3FB12RT, but more expensive.

⁵Product numbers ending in “ST” have shunt tripping style bolted pressure switch.

Meter Mod III

Main fusible switch module with integral pull box (single-phase and three-phase) - EUSERC unit

Main ampere rating	Interrupting current rating (kAIC)	Wire entry	Mounting	Main wire size AWG/kcmil Cu/Al - phase	Main wire size AWG/kcmil Cu/Al - neutral	Compression lug landing kit	Ordering code	
							Single-phase, 3 wire 120/240 Vac	Three-phase, 4 wire / single-phase, 3 wire 120/240 Vac, 208Y120 Vac, 240/120 Vac 120/240 Vac
400	100	Bottom	End or center	Compression lug landing kit included (NEMA 2-hole spacing)	Compression lug landing kit included (NEMA 2-hole spacing)	Included	TMPFB4RCLL	TMP3FB4RCLL
600							TMPFB6RCLL	TMP3FB6RCLL
800							TMPFB8RCLL	TMP3FB8RCLL
1200							TMPFB12RCLLT ¹	TMP3FB12RCLLT

¹Center-feed only for single-phase meter modules with 800A horizontal bus rating.

Main fusible switch modules—fuses and compression lugs

Class T fuses rated at 200K @ 240V

Frame size	Ampere rating	Ordering code
400	250	TFUSE250
	300	TFUSE300
	250	TFUSE350
	400	TFUSE400
600	500	TFUSE500
	600	TFUSE600
800	800	TFUSE800
1200	1200	A3T1200

Class L fuses rated at 200K @ 240V

Ampere Rating	Ordering code
600	A4BY600
650	A4BY650
700	A4BY700
750	A4BY750
800	A4BY800
900	A4BY900
1000	A4BY1000
1100	A4BY1100
1200	A4BY1200
1350	A4BY1350
1400	A4BY1400
1500	A4BY1500
1600	A4BY1600
1800	A4BY1800
2000	A4BY2000

Meter Mod III



Main lug module, single-phase, 3 wire 120/240 Vac - lugs included

Main ampere rating	Interrupting ¹ current rating (kAIC)	Wire entry	Mounting	Main wire size AWG/kcmil Cu/Al - phase	Main wire size AWG/kcmil Cu/Al - neutral	Stud sets per phase and neutral	Compression lug landing kit	Ordering code
400	–	Bottom/	End or	–	–	–	–	Use 3-phase
600	–	Top	center	–	–	–	–	Use 3-phase
800	100			(2) 1/0-750 or (4) 1/0-300	(2) 1/0-750 or (4) 1/0-300	2	Order separately	TMPL8R
1200				(3) 1/0-750 or (6) 1/0-300	(3) 1/0-750 or (6) 1/0-300	3		TMPL12R
1600				(6) 250-500	(6) 250-500	3		TMPL16R
2000				(8) 1/0-750	(8) 1/0-750	3		TMPL20R
2000	100	Bottom/	End or	(8) 1/0-750	(8) 1/0-750	3		TMPL20RCRIS
		Top	center					

Main lug module, three-phase, 4 wire 208Y/120 Vac - lugs included

Main ampere rating	Interrupting ¹ current rating (kAIC)	Wire entry	Mounting	Main wire size AWG/kcmil Cu/Al - phase	Main wire size AWG/kcmil Cu/Al - neutral	Stud sets per phase and neutral	Compression lug landing kit	Ordering code
400	100	Bottom/	End or	(1) 6-600 or (2) 1/0-250	(1) 6-600 or (2) 1/0-250	1	Order separately	TMP3L4R
600				(2) 250-500	(2) 250-500	1		TMP3L4RCU ²
800				(2) 1/0-750 or (4) 1/0-300	(2) 1/0-750 or (4) 1/0-300	2		TMP3L6R
1200				(3) 1/0-750 or (6) 1/0-300	(3) 1/0-750 or (6) 1/0-300	2		TMP3L6RCU ²
1600				(6) 250-500	(6) 250-500	2		TMP3L8R
2000				(8) 1/0 - 750	(8) 1/0 - 750	2		TMP3L8RCU ²
								TMP3L12R
								TMP3L16R
								TMP3L20R

Main lug with feed through, three phase, four wire / single phase, three wire 120/240 Vac, 208Y/120 Vac

Main ampere rating	Interrupting ¹ current rating (kAIC)	Incoming line	Outgoing load	Stud sets per phase and neutral	Compression lug landing kit	Ordering code
1200	100	(5) Up to 750 MCM per phase/neutral (AL/CU)	(5) Up to 750 MCM per phase/neutral (AL/CU)	2	–	TMP3L12RCRIS
1600				2	–	TMP3L16RCRIS
2000		(8) 1/0 - 750 MCM per phase/neutral (AL/CU)	(8) 1/0 - 750 MCM per phase/neutral (AL/CU)	2	–	TMP3L20RCRIS

¹Limited to the lowest marked short circuit rating of the main and meter modules used.

²Copper bussed – CON ED Approved.

Meter Mod III



—
TMPU4R



—
TMP3U4R

Main pull box module, single-phase, 3 wire 120/240 Vac

Main ampere rating	Interrupting ¹ current rating (kAIC)	Wire entry	Mounting	Main wire size AWG/kcmil Cu/Al - phase	Main wire size AWG/kcmil Cu/Al - neutral	Stud sets per phase and neutral	Compression lug landing kit	Ordering code
400	100	Bottom/ Top	End	(1) 1/0-750 or (2) 1/0-300 (load)	(1) 1/0-750 or (2) 1/0-300 (load)	1	Included	TMPU4R
800				(2) 1/0-750 or (4) 1/0-300 (load)	(2) 1/0-750 or (4) 1/0-300 (load)	2		TMPU8R
1200				(4) 2-600 load	(4) 2-600 load	3		TMPU12R

Main pull box module, three-phase, 4 wire 208Y/120 Vac

Main ampere rating	Interrupting ¹ current rating (kAIC)	Wire entry	Mounting	Main wire size AWG/kcmil Cu/Al - phase	Main wire size AWG/kcmil Cu/Al - neutral	Stud sets per phase and neutral	Compression lug landing kit	Ordering code
400	100	Bottom/ Top	End	(1) 1/0-750 or (2) 1/0-300 (load)	(1) 1/0-750 or (2) 1/0-300 (load)	1	Included	TMP3U4R
800				(2) 1/0-750 or (4) 1/0-300 (load)	(2) 1/0-750 or (4) 1/0-300 (load)	2		TMP3U8R
1200				(4) 2-600 load	(4) 2-600 load	3		TMP3U12R

¹Limited to the lowest marked short circuit rating of the main and meter modules used.

Meter Mod III

Single phase 800A horizontal bussing 125 & 200A sockets

Socket amps	No. of sockets	Ordering code		
		Ring type socket (4 jaw socket standard)	Ringless type socket (5th jaw socket standard)	Ringless type socket (5th jaw socket standard) horned bypass factory installed
125	2	TMP8212R ¹	TMPR8212R	TMPR8212RHB
	3	TMP8312R ¹	TMPR8312R	TMPR8312RHB
	4	TMP8412R ¹	TMPR8412R	TMPR8412RHB
	5	TMP8512R ¹	TMPR8512R	TMPR8512RHB
	6	TMP8612R ¹	TMPR8612R	TMPR8612RHB
200	2	TMP8220R ¹	TMPR8220R	TMPR8220RHB
	3	TMP8320R ¹	TMPR8320R	TMPR8320RHB
	4	TMP8420R ¹	TMPR8420R	TMPR8420RHB
	5	TMP8520R ¹	TMPR8520R	TMPR8520RHB
	5	TMP8520RBUS ^{1,2}	TMPR8520RBUS ²	—

Single phase 800A horizontal bussing 125 & 200A sockets - CON ED approved

Socket amps	No. of sockets	Factory phase balancing	Ordering code	
			Ring type socket factory phase balanced with copper bus (4 jaw socket standard)	
			NEMA 1 indoor enclosure	NEMA 3R outdoor enclosure
125	2	AB	TMP8212AB	TMP8212RAB
		AC	TMP8212AC	TMP8212RAC
		BC	TMP8212BC	TMP8212RBC
	3	AB	TMP8312AB	TMP8312RAB
		AC	TMP8312AC	TMP8312RAC
		BC	TMP8312BC	TMP8312RBC
	4	AB	TMP8412AB	TMP8412RAB
		AC	TMP8412AC	TMP8412RAC
		BC	TMP8412BC	TMP8412RBC
	5	AB	TMP8512AB	TMP8512RAB
		AC	TMP8512AC	TMP8512RAC
		BC	TMP8512BC	TMP8512RBC

Single phase 1200A horizontal bussing 125 & 200A sockets

Socket amps	No. of sockets	Ordering code		
		Ring type socket (4 jaw socket standard)	Ringless type socket (5th jaw socket standard)	Ringless type socket (5th jaw socket standard) horned bypass factory installed
125	2	TMP12212R ¹	TMPR12212R	TMPR12212RHB
	3	TMP12312R ¹	TMPR12312R	TMPR12312RHB
	4	TMP12412R ¹	TMPR12412R	TMPR12412RHB
	5	TMP12512R ¹	TMPR12512R	TMPR12512RHB
	6	TMP12612R ¹	TMPR12612R	TMPR12612RHB
200	2	TMP12220R ¹	TMPR12220R	TMPR12220RHB
	3	TMP12320R ¹	TMPR12320R	TMPR12320RHB
	4	TMP12420R ¹	TMPR12420R	TMPR12420RHB
	5	TMP12520R ¹	TMPR12520R	TMPR12520RHB
	5	TMP12520RBUS ^{1,2}	TMPR12520RBUS ²	TMPR12520RHBUS ²

¹ One snap-type, aluminum sealing ring (TSR5) per socket included

² BUS suffix indicates change to centerline of horizontal bussing from 28.88" to 41.01" from bottom of unit

Meter Mod III

Single phase 800A horizontal bussing 125 & 200A sockets—MEG approved

Socket amps	No. of sockets	Ordering code		
		Ring type socket (4 jaw socket standard)	Ringless type socket (5th jaw socket standard)	Ringless type socket (5th jaw socket standard) horned bypass factory installed
125	2	TMP8212RF ¹	TMPR8212RF	TMPR8212RHBF
	3	TMP8312RF ¹	TMPR8312RF	TMPR8312RHBF
	4	TMP8412RF ¹	TMPR8412RF	TMPR8412RHBF
	5	TMP8512RF ¹	TMPR8512RF	TMPR8512RF + TMPBPH20A
	6	TMP8612RF ¹	TMPR8612RF	TMPR8612RF
200	2	Use TMP8320RF with bottom blank (TCB12B)	TMPR8220RF	TMPR8220RF + TMPBPH20A
	3	TMP8320RF ¹	TMPR8320RF	TMPR8320RF + TMPBPH20A
	4	TMP8420RF ¹	TMPR8420RF	TMPR8420RHBF
	5	If allowed, use Ringless TMPR8520RF	TMPR8520RF	TMPR8520RF + TMPBPH20A

Single phase 1200A horizontal bussing 125 & 200A sockets—MEG approved

Socket amps	No. of sockets	Ordering code		
		Ring type socket (4 jaw socket standard)	Ringless type socket (5th jaw socket standard)	Ringless type socket (5th jaw socket standard) horned bypass factory installed
125	4	Use TMP12420RF	TMPR12412RF	TMPR12412RHBF
	5	If allowed, use Ringless TMPR12512RF	TMPR12512RF	TMPR12512RHBF
	6	If allowed, use Ringless TMPR12612RF	TMPR12612RF	Use TMPR12612RF + TMPBPH20A
200	4	TMP12420RF ¹	TMPR12420RF	TMPR12420RHBF
	5	If allowed, use Ringless TMPR12520RF	TMPR12520RF	Use TMPR12520RF + TMPBPH20A

NOTE: These MEG approved units have an added cotter pin that eliminates failure of the metering stabs when the meter is plugged into the meter base.

¹One snap-type, aluminum sealing ring (TSR5) per socket included



Meter Mod III

Meter stack modules—commercial

Product overview



The 5-Jaw and 7-jaw meter sockets include a built-in lever bypass and jaw release. The ground wire is factory connected.

- Features**
- Indoor/outdoor construction for use any of our meter modules for NEMA 1 or NEMA 3R applications.
 - All modules accept 15-225A bolt-on breakers up to 100K interrupting rating.
 - The unmetered vertical bus is enclosed to guard against power theft.
 - Neutral assembly permits convenient termination of the neutral conductors.
 - Front accessible bolts
 - Enclosed horizontal bus
 - Factory installed equipment ground bars on top and bottom gutters
 - Removable top cap; knockouts in back and bottom

Ordering code construction - commercial

	T	MP	3	8	8	20	T	R	F	
ABB identification										Special
Type										F = MEG Approved
MP = Meter Mod ring type										HB = Horned Bypass (Ringless only)
MPR = Meter Mod ringless										AB = Factory Installed AB Phased (CONED)
MPK = Meter Mod K-base socket										AC = Factory Installed AC Phased (CONED)
Insert for 3-Phase										BC = Factory Installed BC Phased (CONED)
Horizontal bus rating										Enclosures
8 = 800A										R = Type 3R rainproof outdoor
12 = 1200A										Blank = Type N1 indoor
Socket positions										Insert for tenant breaker
1-6										Socket Rating
										12 = 125A
										20 = 200A
										22 = 225A
										40 = 400A

NOTE:

- Single-phase/3 wire 120/240 Vac or three-phase, 4 wire, horizontal bus, 208Y/120 Vac system voltage
- 1200 amp, 4 wire cross bus (aluminum)
- UL Listed
- Front accessible field phase balancing by meter socket
- (1) 14-2 equipment ground kit per socket, factory installed
- Only 225A and 400A ringless type meter stacks contain lever bypass
- 125A and 200A meter sockets do not contain lever bypass

Meter Mod III



Single-phase—225A/400A ringless sockets w/ lever bypass

Socket amps	No. of sockets	Factory installed fifth jaw (TM5JA bused)	Ordering code
225	1	Included	TMPR12122R
	2		TMPR12222R
	3		TMPR12322R
	4		TMPR12422R
400	1	—	TMPR12140RB ^{1,3}
	2		TMPR12240RB ^{2,3}
	1		TMPK12140RB
	1		TMPK12140RBA



Single-phase—200A ring sockets w/ test bypass kits –EUSERC⁴

Socket amps	No. of sockets	Factory installed fifth jaw (TM5JA bused)	Ordering code
200	1	Included	TMP8120RTAB ⁵
			TMP8120RTAC ⁵
			TMP8120RTBC ⁵
	2		TMP112220RTAB ⁵
			TMP112220RTAC ⁵
			TMP112220RTBC ⁵
	3		TMP112320RTAB ⁵
			TMP112320RTAC ⁵
			TMP112320RTBC ⁵



Three-phase, 225A/400A ringless type sockets with lever bypass

Socket amps	No. of sockets	Factory installed seventh jaw (7 terminal)	Ordering code
225	1	Included	TMPR312122R ⁶
	2		TMPR312222R ⁶
	3		TMPR312322R ⁶
	4		TMPR312422R ⁶
400	1	—	TMPR312140TR ^{6,8}
	1		TMPR312140RB ^{6,7}
	2		TMPR312240RB ^{6,2}
	1		TMPK312140RB
	1		TMPK312140RBA

¹One 400A tenant main breaker included.
²Two 400A tenant breakers included.
³Main breaker modules alternate rating plugs table for alternate 400A rating plugs
⁴Meet EUSERC requirement
⁵Suffixes AB, BC, AC reflect the factory-set phase balancing.
⁶Shipped from the factory as 7-jaw units (7 terminal.)
⁷400 Amp tenant breaker included, 65 kAIC
⁸Requires two tenant main breakers, 400 amp maximum sum of branch ratings. Cannot be used to serve a single 400A load.



Three-phase, 200A ring sockets w/ test bypass kits –EUSERC

Socket amps	No. of sockets	Factory installed seventh jaw (7 terminal)	Ordering code
200	1	Included	TMP38120RT ¹
	2		TMP312220RT ¹
	3		TMP312320RT ¹

¹Meets EUSERC requirements. "T" suffix indicates EUSERC test bypass kit included.

Single socket metering

Table of contents

Single socket metering	
Product overview	2-24
Ordering code construction	2-24
Single phase, 600 V ringless	2-25
Three phase, 600 V ringless	2-27
Single or three phase, 600V ringless	2-28
Single phase transformer rated	2-28

Product overview



Specifications and features

- Single phase or three phase
- UL Listed
- Tested and UL listed up to 10kAIC short circuit rating
- Selected items are utility approved
- NEMA 3R enclosure
- Integral duplex ground extruded in neutral lug
- G90 galvanized bridge provides superior corrosion resistance
- Heavy duty lug screws provide stronger connection component for reliable termination
- 125A units have horn bypass kit that is field installable by changing slide-nut
- 200A units have jaws made of copper plated alloy and have reinforcing springs to help maintain electrical connections
- 200A units have slide-nuts that allow for ease of installation of conductors and helps eliminate lost components
- Standard pack: 1

Ordering code construction

[illegible]

Single socket metering

Single phase, ringless

Amp	Wire range (CU/AL)	Overhead/ underground line feed	Ground range (CU/AL)	Triplex ground	No. of terminals	Lever bypass	Horned bypass	Hub type	Enclosure N3R	UL & utility approved	Ordering code
20	#12	Bottom	(2) #14-2	N	13	N	N	Solid top	G90 Steel	UL, DTE	1007003CGE
	#12	Bottom	(2) #14-2	N	8	N	N	Solid top			1007361CGE
125	#8-2/0	Bottom	No ground	N	4	N	N	Solid top			1006385BGE
	#8-2/0	Top	(1) #14-2	Y	4	N	N	Small hub opening	G90 Steel	UL	GEKR1AS1BTZ
	#8-2/0	Top	(1) #14-2	Y	4	N	Y	Small hub opening	G90 Steel	UL, AEP	GEKS1AS1BTV
	#8-2/0	Top/bottom	(1) #14-2	Y	4	N	N	Small hub cover plate	Aluminum	UL, GP, MEG	UATZRS101CFLGE
	#8-2/0	Top/bottom	No ground	N	4	N	Y	Small hub opening	G90 Steel	UL	UBHRS101BGE
	#8-2/0	Top/bottom	(1) #14-2	Y	4	N	Y	Small hub opening	G90 Steel	UL, AEP	UFHTRS101BGE
	#8-2/0	Top/bottom	(1) #14-2	Y	5	N	Y	Small hub opening	G90 Steel	UL	UGHTRS101BGE
	#8-2/0	Top/bottom	(1) #14-2	Y	4	N	Y	Small hub opening			UHTRS101BGE
	#8-2/0	Top/bottom	(2) #14-2	Y	4	N	N	Small hub opening			URS101BCPLGE
	#8-2/0	Top/bottom	(2) #14-2	Y	4	N	N	Small hub cover plate			URS101CCPLGE
	#8-2/0	Top/bottom	(1) #14-2	Y	4	N	N	Small hub opening	G90 Steel	UL, CMP	UTRS101BGE
	#8-2/0	Top/bottom	(1) #14-2	Y	4	N	N	Small hub cover plate	G90 Steel	UL, GP, MEG	UTZRS101CFLGE
150	#8-250MCM	Top/bottom	(1) #14-2	Y	4	N	N	Small hub opening	G90 Steel	UL	UTRS502BGE
200	#8-250MCM	Top/bottom	No ground	N	4	N	N	Small hub opening	G90 Steel	UL, DTE	1004709DGE
	#8-250MCM	Top/bottom	No ground	N	4	N	N	Small hub cover plate			1004710EGE
	#8-250MCM	Top/bottom	(1) #14-2	Y	4	N	Y	Small hub opening	G90 Steel	UL, AEP, CECHA	1007665AGE
	#8-250MCM	Top/bottom	(1) #14-2	Y	4	N	Y	Small hub opening	G90 Steel	UL, CECHA	1007665GE
	#6-350MCM	Top/bottom	(1) #14-2	Y	4	Y	N	Small hub cover plate	Aluminum	UL, AEP	1011692GE
	#8-350MCM	Top	(1) #14-2	Y	4	N	N	Small hub opening	G90 Steel	UL	GEKR1CS1BT
	#8-250MCM	Top	(1) #14-2	Y	4	N	Y	Small hub opening	G90 Steel	UL, AEP	GEKS1CS1BJTV
	#8-350MCM	Top/bottom	(1) #14-2	Y	4	N	Y	Small hub cover plate			GEKS1CS1DTV
	#8-350MCM	Side	(1) #14-2	Y	4	N	Y	Solid top			GEKS1DS1ATV
	#8-350MCM	Side	(2) #14-2	N	4	N	N	(2) Small hub cover plates	G90 Steel	UL	U92197CCPLGE
	#6-350MCM	Top/bottom	(1) #14-2	Y	4	Y	N	Small hub opening	Aluminum	UL, GP, MEG	UATH4203BFLGE
	#6-350MCM	Top/bottom	(1) #14-2	Y	4	Y	N	Large hub opening			UATH4203TFLGE
	#6-350MCM	Top/bottom	(1) #14-2	Y	4	Y	N	Small hub cover plate			UATH4213CFLGE
	#6-350MCM	Top/bottom	(1) #14-2	Y	4	Y	N	Large hub cover plate			UATH4213UFLGE
	#8-250MCM	Top/bottom	(1) #14-2	Y	4	N	N	Small hub opening			UATRS202BFLGE
	#8-250MCM	Top/bottom	(1) #14-2	Y	4	N	N	Small hub cover plate			UATRS212CFLGE
	#8-350MCM	Bottom	(1) #14-2	Y	4	N	N	Solid top			UATRS213AFLGE
	#8-350MCM	Top/bottom	(1) #14-2	Y	4	N	N	Small hub cover plate			UATRS213CFLGE
	#8-350MCM	Bottom	(1) #14-2	Y	4	N	N	Solid top			UATRS223AFLGE
	#8-250MCM	Top	No ground	N	4	N	Y	Small hub opening	G90 Steel	UL	UBHRS202BGE
	#8-250MCM	Top/bottom	No ground	N	4	N	Y	Small hub opening			UBHRS212BGE
	#8-250MCM	Top/bottom	(1) #14-2	Y	4	N	Y	Small hub opening	G90 Steel	UL, AEP	UFHTRS202BGE
	#8-350MCM	Bottom	(1) #14-2	Y	4	N	Y	Solid top			UFHTRS223AGE
	#8-350MCM	Top/bottom	(1) #14-2	Y	4	N	Y	Small hub cover plate			UFHTRS233CGE
	#6-350MCM	Top/bottom	(1) #14-2	Y	4	Y	N	Small hub cover plate			UFTH4213CGE
	#8-250MCM	Top/bottom	No ground	N	5	N	Y	Small hub cover plate	G90 Steel	UL, KCP&L	UGHRS212CKCGE
	#8-350MCM	Top/bottom	(1) #14-2	Y	5	N	Y	Small hub opening	G90 Steel	UL	UGHTRS213BGE
	#6-350MCM	Top/bottom	(1) #14-2	Y	5	Y	N	Small hub cover plate			UGTH4213CGE
	#8-350MCM	Top/bottom	(1) #14-2	Y	5	N	N	Small hub cover plate			UGTRS213CGE
	#6-350MCM	Top/bottom	No ground	N	4	Y	N	Small hub cover plate			UH4213CGE
	#8-250MCM	Top/bottom	(1) #14-2	Y	4	N	Y	Small hub opening			UHTRS202BGE
	#8-350MCM	Side	(1) #14-2	Y	4	N	Y	Solid top			UHTRS223AGE

(continued on next page)

Single socket metering

Single phase, ringless (continued)

Amp	Wire range (CU/AL)	Overhead/ underground line feed	Ground range (CU/AL)	Triplex ground	No. of terminals	Lever bypass	Horned bypass	Hub type	Enclosure N3R	UL & utility approved	Ordering code
200	#8-350MCM	Top/bottom	(1) #14-2	Y	4	N	N	(2) Small hub cover plates	G90 steel	UL, GP, MEG	UT92197CCFLGE
	#6-350MCM	Top/bottom	(1) #14-2	Y	4	Y	N	Small hub opening	G90 steel	UL, GP, MEG	UTH4203BFLGE
	#6-350MCM	Top/bottom	(1) #14-2	Y	4	Y	N	Large hub opening			UTH4203TFLGE
	#6-350MCM	Top/bottom	(1) #14-2	Y	4	Y	N	Small hub opening			UL
	#6-350MCM	Top/bottom	(1) #14-2	Y	4	Y	N	Small hub cover plate	G90 steel	UL, GP, MEG	UTH4213CFLGE
	#6-350MCM	Top/bottom	(1) #14-2	Y	4	Y	N	Large hub cover plate	G90 steel	UL, CMP	UTH4213UFLGE
	#8-250MCM	Top/bottom	(1) #14-2	Y	4	N	N	Small hub opening			UTRS202BGE
	#8-250MCM	Top/bottom	(1) #14-2	Y	4	N	N	Small hub opening			UL
	#8-250MCM	Top/bottom	(1) #14-2	Y	4	N	N	Small hub cover plate	G90 steel	UL	UTRS212CGE
	Line: (1) #8- 350MCM load: (2) #8-250MCM	Top/bottom	(1) #14-2	Y	4	N	N	Small hub opening			UTRS2138BGE
	#8-350MCM	Bottom	(1) #14-2	Y	4	N	N	Solid top			G90 steel
	#8-350MCM	Top/bottom	(1) #14-2	Y	4	N	N	Small hub opening	G90 steel	UL, CMP	UTRS213BGE
	#8-350MCM	Top/bottom	(1) #14-2	Y	4	N	N	Small hub cover plate	G90 steel	UL, MEG	UTRS213CFLGE
	#8-350MCM	Top/bottom	(1) #14-2	Y	4	N	N	Small hub cover plate	G90 steel	UL, CMP	UTRS213CGE
	#8-350MCM	Bottom	(1) #14-2	Y	4	N	N	Solid top	G90 steel	UL, MEG	UTRS223AFLGE
	#8-350MCM	Bottom	(1) #14-2	Y	4	N	N	Solid top	G90 steel	UL	UTRS223AGE
320	Studs - (1) 600MCM or (2) 350MCM	Top	(1) #14 -1/0	Y	4	Y	N	Large hub opening	G90 steel	UL, CECHA	1007672GE¹
	(2) #6-350MCM	Top/bottom	(1) #14 -1/0	Y	4	Y	N	Large hub cover plate	G90 steel	UL, AEP	1008068GE
	#4-600MCM	Bottom	(1) #14 -1/0	Y	4	Y	N	Solid top	G90 steel	UL	1008435GE
	Studs - (1) 600MCM or (2) 350MCM	Top/bottom	(1) #14 -1/0	Y	4	Y	N	Large hub cover plate	G90 steel	UL, GP, MEG	1008836GE¹
	Studs - (1) 600MCM or (2) 350MCM	Top/bottom	(1) #14 -1/0	Y	4	Y	N	Large hub cover plate	Aluminum	UL, GP, MEG	1008837GE¹
	Studs - (1) 600MCM or (2) 350MCM	Top/bottom	(1) #14 -1/0	Y	4	Y	N	Large hub cover plate	G90 steel	UL	1009260GE¹
	Studs - (1) 600MCM or (2) 350MCM	Top/bottom	No ground	N	4	Y	N	Large hub cover plate	G90 steel	UL, DTE	1009788AGE¹
	Studs - (1) 600MCM or (2) 350MCM	Top/bottom	(1) #14 -1/0	Y	4	Y	N	Large hub opening	Aluminum	UL, AEP	UAFTH4330TSHGE¹
	#4-600MCM	Top/bottom	(1) #14 -1/0	Y	4	Y	N	Large hub opening			UAFTH4336TSHGE
	Studs - (1) 600MCM or (2) 350MCM	Top/bottom	(1) #14 -1/0	Y	4	Y	N	Large hub opening	Aluminum	UL, GP, MEG	UATH4300TFLGE¹
	Studs - (1) 600MCM or (2) 350MCM	Top/bottom	(1) #14 -1/0	Y	4	Y	N	Large hub opening	G90 steel	UL, AEP	UFTH4330TGE¹
	#4-600MCM	Top/bottom	(1) #14 -1/0	Y	4	Y	N	Large hub opening			UFTH4336TGE
	Line: (1) #4- 600MCM load: (2) #6-250MCM	Top	(2) #14-2	Y	4	Y	N	Large hub opening	G90 steel	UL	UH43068TCPLGE
	Studs - (1) 600MCM or (2) 350MCM	Top/bottom	(1) #14-1/0	Y	4	Y	N	Large hub opening	G90 steel	UL, GP, MEG	UTH4300TFLGE¹
	Studs - (1) 600MCM or (2) 350MCM	Top/bottom	(1) #14-1/0	Y	4	Y	N	Large hub opening	G90 steel	UL, CMP	UTH4330TGE¹
	Line: (1) #4- 600MCM load: (2) #6-350MCM	Top	(1) #14-1/0	Y	4	Y	N	Large hub opening	G90 steel	UL	UTH43369TGE
	Line: (1) #4- 600MCM load: (2) #6-350MCM	Top/bottom	(1) #14-1/0	Y	4	Y	N	Large hub opening			UTH73069THLGE

¹ Lugs not included. This product comes with studs only. Order lugs separately, see accessories on page 2-42. One (1) lug per kit, order appropriate quantity needed. For example, order 3 lugs (A, C, N) if meter is 1-phase or 4 lugs (A, B, C, N) if meter is 3-phase.

Single socket metering

Three phase, ringless

Amp	Wire range (CU/AL)	Overhead/ underground line feed	Ground range (CU/AL)	Triplex ground	No. of terminals	Lever bypass	Horned bypass	Hub type	Enclosure N3R	UL & utility approved	Ordering code
20	#10 - #12	Top/bottom	(1) #14-2	Y	13	N	N	Small hub cover plate	G90 steel	UL	URSTS132CGE
200	#6-350MCM	Top	(1) #14-2	Y	7	Y	N	Large hub opening	G90 steel	UL, CECHA	1007670GE
	#6-350MCM	Top/bottom	(1) #14-2	Y	7	Y	N	Large hub opening	Aluminum	UL, AEP	UAFTH7213TSHGE
	#6-350MCM	Top/bottom	(1) #14-2	Y	7	Y	N	Small hub opening	Aluminum	UL, GP, MEG	UATH7203BFLGE
	#6-350MCM	Top/bottom	(1) #14-2	Y	7	Y	N	Large hub opening			UATH7203TFLGE
	#6-350MCM	Top/bottom	(1) #14-2	Y	7	Y	N	Small hub cover plate			UATH7213CFLGE
	#6-350MCM	Top/bottom	(1) #14-2	Y	7	Y	N	Large hub cover plate			UATH7213UFLGE
	#6-350MCM	Top/bottom	No ground	N	7	Y	N	Small hub opening	G90 steel	UL	UBC7213BGE
	#6-350MCM	Top/bottom	No ground	N	7	Y	N	Large hub opening			UBH7213TGE
	#6-350MCM	Top/bottom	(1) #14-2	Y	7	Y	N	Small hub opening	G90 steel	UL, AEP	UFTH7213BGE
	#6-350MCM	Top/bottom	(1) #14-2	Y	7	Y	N	Large hub opening			UFTH7213TGE
	#6-350MCM	Top/bottom	(2) #14-2	Y	7	Y	N	Large hub opening			UFTTH7213TGE
	#6-350MCM	Top/bottom	No ground	N	7	Y	N	Small hub cover plate	G90 steel	UL, DTE	UH7213CGE
	#6-350MCM	Top/bottom	No ground	N	7	Y	N	Small hub cover plate	G90 steel	UL, KCP&L	UH7213CKCGE
	#6-350MCM	Top/bottom	(1) #14-2	Y	7	Y	N	Small hub opening	G90 steel	UL, GP, MEG	UTH7203BFLGE
	#6-350MCM	Top/bottom	(1) #14-2	Y	7	Y	N	Large hub opening			UTH7203TFLGE
	#6-350MCM	Top/bottom	(1) #14-2	Y	7	Y	N	Large hub opening	G90 steel	UL, CMP	UTH7203TGE
	#6-350MCM	Top/bottom	(1) #14-2	Y	7	Y	N	Small hub opening	G90 steel	UL	UTH7213BGE
	#6-350MCM	Top/bottom	(1) #14-2	Y	7	Y	N	Large hub opening	G90 steel	UL	UTH7213TGE
	#6-350MCM	Top/bottom	(1) #14-2	Y	7	Y	N	Large hub opening			UTH7213THLGE
	#6-350MCM	Top/bottom	(1) #14-2	Y	7	Y	N	Large hub cover plate	G90 steel	UL, CMP	UTH7213UGE
320	Studs - (1) 600MCM or (2) 350MCM	Top/bottom	(1) #14 -1/0	Y	7	Y	N	Large hub opening	Aluminum	UL, AEP	UAFTH7330TSHGE ¹
	#4-600MCM	Top/bottom	(1) #14 -1/0	Y	7	Y	N	Large hub opening			UAFTH7336TSHGE
	Studs - (1) 600MCM or (2) 350MCM	Top/bottom	(1) #14 -1/0	Y	7	Y	N	Large hub opening	Aluminum	UL, MEG	UATH7300TFLGE ¹
	Studs - (1) 600MCM or (2) 350MCM	Side	(1) #14 -1/0	Y	7	Y	N	Large hub cover plate	Aluminum	UL, GP, MEG	UATH7330UFLGE ¹
	Studs - (1) 600MCM or (2) 350MCM	Top/bottom	(1) #14 -1/0	Y	7	Y	N	Large hub opening	G90 steel	UL, AEP	UFTH7330TGE ¹
	#4-600MCM	Top/bottom	(1) #14 -1/0	Y	7	Y	N	Large hub opening			UFTH7336TGE
	Studs - (1) 600MCM or (2) 350MCM	Top/bottom	(2) #14-1/0	Y	7	Y	N	Large hub opening			UFTTH7330TGE ¹
	#4-600MCM	Top/bottom	(2) #14-1/0	Y	7	Y	N	Large hub opening			UFTTH7336TGE
	Studs - (1) 600MCM or (2) 350MCM	Top/bottom	(1) #14-1/0	Y	7	Y	N	Large hub opening	G90 steel	UL, GP, MEG	UTH7300TFLGE ¹
	Studs - (1) 600MCM or (2) 350MCM	Top/bottom	(1) #14-1/0	Y	7	Y	N	Large hub opening	G90 steel	UL	UTH7330TGE ¹
	Studs - (1) 600MCM or (2) 350MCM	Top/bottom	(1) #14-1/0	Y	7	Y	N	Large hub cover plate	G90 steel	UL, GP, MEG	UTH7330UFLGE ¹
	Line: (1) #4- 600MCM load: (2) #6-350MCM	Top/bottom	(1) #14-1/0	Y	7	Y	N	Large hub opening	G90 steel	UL	UTH73369THLGE

¹Lugs not included. This product comes with studs only. Order lugs separately, see accessories on page 2-42. One (1) lug per kit, order appropriate quantity needed.
For example, order 3 lugs (A, C, N) if meter is 1-phase or 4 lugs (A, B, C, N) if meter is 3-phase.

Single socket metering

Single or three phase, ringless

Amp	Wire range (CU/AL)	Overhead/ underground line feed	Ground range (CU/AL)	Triplex ground	No. of terminals	Lever bypass	Horned bypass	Hub type	Enclosure N3R	UL & utility approved	Ordering code
200	#6-350MCM	Top/bottom	(1) #14-2	Y	5	Y	N	Small hub opening	Aluminum	UL, AEP	UAFTH5213BNDGE
	#6-350MCM	Top/bottom	(1) #14-2	Y	5	Y	N	Small hub opening	Aluminum	UL, MEG	UATH5203BFLGE
	#6-350MCM	Top/bottom	(1) #14-2	Y	5	Y	N	Large hub opening			UATH5203TFLGE
	#6-350MCM	Top/bottom	(1) #14-2	Y	5	Y	N	Small hub cover plate			UATH5213CFLGE
	#6-350MCM	Top/bottom	(1) #14-2	Y	5	Y	N	Large hub cover plate			UATH5213UFLGE
	#6-350MCM	Top/bottom	(1) #14-2	Y	5	Y	N	Small hub opening	G90 steel	UL, AEP	UFTH5213BNDGE
	#6-350MCM	Top/bottom	(1) #14-2	Y	5	Y	N	Small hub opening	G90 steel	UL, MEG	UTH5203BFLGE
	#6-350MCM	Top/bottom	(1) #14-2	Y	5	Y	N	Small hub opening	G90 steel	UL, CMP	UTH5203BGE
	#8-350MCM	Top/bottom	(1) #14-2	Y	5	Y	N	Large hub opening	G90 steel	UL, MEG	UTH5203TFLGE
	#6-350MCM	Top/bottom	(1) #14-2	Y	5	Y	N	Small hub opening	G90 steel	UL	UTH5213BNDGE
	#6-350MCM	Top/bottom	(1) #14-2	Y	5	Y	N	Small hub cover plate	G90 steel	UL, MEG	UTH5213CFLGE
	#6-350MCM	Top/bottom	(1) #14-2	Y	5	Y	N	Small hub cover plate	G90 steel	UL, CMP	UTH5213CGE
320	#6-350MCM	Top/bottom	(1) #14-2	Y	5	Y	N	Large hub cover plate	G90 steel	UL, MEG	UTH5213UFLGE
	#6-350MCM	Top/bottom	(1) #14-2	Y	5	Y	N	Small hub cover plate	G90 steel	UL, CMP	UTH5233CGE
	Studs - (1) 600MCM or (2) 350MCM	Top/bottom	(1) #14 -1/0	Y	5	Y	N	Large hub opening	Aluminum	UL, MEG	UATH5300TFLGE ¹
	Studs - (1) 600MCM or (2) 350MCM	Top/bottom	(1) #14 -1/0	Y	5	Y	N	Large hub cover plate			UATH5330UFLGE ¹
	Studs - (1) 600MCM or (2) 350MCM	Top/bottom	(1) #14-1/0	Y	5	Y	N	Large hub opening			UTH5300TFLGE ¹
	Studs - (1) 600MCM or (2) 350MCM	Top/bottom	(1) #14-2	Y	5	Y	N	Large hub cover plate			UTH5330UFLGE ¹

¹ Lugs not included. This product comes with studs only. Order lugs separately, see accessories on page 2-53. One (1) lug per kit, order appropriate quantity needed. For example, order 3 lugs (A, C, N) if meter is 1-phase or 4 lugs (A, B, C, N) if meter is 3-phase.

Single phase transformer rated, FP&L approved¹

Amp	End lug size (CU/AL)	Side lug size (CU/AL)	Overhead/ underground line feed	Number of terminals	Hub type	Enclosure NEMA 3R	UL & utility approved	Ordering code
20	#14-2	#14-2	Top/bottom	6	Small hub cover plate	Aluminum	UL, FP&L	UASTH61C755GE
	#14-2	#14-2	Top/bottom	6	Small hub cover plate	Steel	UL, FP&L	USTH61C756GE
	#14-2	#14-2	Top/bottom	13	Small hub opening	Aluminum	UL, FP&L	UASTH131B757GE
	#14-2	#14-2	Top/bottom	13	Small hub cover plate	Steel	UL, FP&L	USTH131C758GE

¹ Units come with a test switch (not pre-wired) and have a one piece ringless cover.

Single phase transformer rated, TECO approved²

Amp	End lug size (CU/AL)	Side lug size (CU/AL)	Overhead/ underground line feed	Number of terminals	Hub type	Enclosure NEMA 3R	UL & utility approved	Ordering code
20	#14-2	#14-2	Top/bottom	6	Small hub opening	Steel	UL, TECO	URSTH62B759GE
	#14-2	#14-2	Top/bottom	6	Small hub opening	Aluminum	UL, TECO	UARSTH62B760GE
	#14-2	#14-2	Top/bottom	13	Small hub cover plate	Steel	UL, TECO	URSTH132C761GE
	#14-2	#14-2	Top/bottom	13	Small hub cover plate	Aluminum	UL, TECO	UARSTH132C762GE


² Units are pre-wired with test switch (per TECO specs) and have a two piece ring type cover.

Horizontal metering

Table of contents

Horizontal metering	
Product overview	2-30
Ordering code construction	2-30
Single phase, ringless type	2-31

Product overview

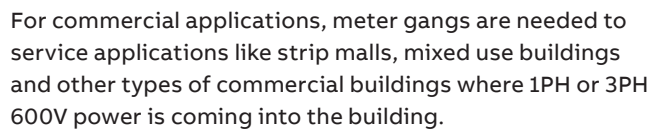

- Single phase
- Top/bottom feed
- UL Listed
- Selected items are utility approved
- NEMA 3R enclosure
- Multiple hub opening and closure plate sizes available
- Hub opening in top endwall, requires use of a bolt-on hub or closing plate
- 1Ø, 600 Vac maximum
- Main lugs only
- End or center feed
- Overhead and underground service feeds
- 10 kAIC short circuit rating (or higher with utility approval)

[illegible]

Horizontal metering

Single phase, ringless

Amp	Gang	Feed type	Overhead/ underground line feed	Line wire range	Ground lug size	Triplex ground	No. of terminals	Lever bypass	Horned bypass	Hub type	Enclosure N3R	UL & utility approved	Ordering code
100	2	End	Top/bottom	#6-250MCM line #8-2/0 load	No ground	N	4	N	N	(2) Small hub cover plates	G90 steel	UL	U2R1421CGE
		Center	Top/bottom	#6-250MCM line #8-2/0 load	No ground	N	4	N	Y	Small hub opening		UL	UBH2R1121BGE
		Center	Top/bottom	#6-250MCM #8-2/0 line load	(1) #14-2	Y	4	N	N	Small hub opening		UL, CMP	UT2R1121BGE
		Center	Top/bottom	#6-250MCM line #8-2/0 load	(1) #14-2	Y	4	N	N	Large hub cover plate		UL, MEG	UTZ2R1121CFLGE
	3	Center	Top/bottom	#6-250MCM line #8-2/0 load	No ground	N	4	N	Y	Small hub opening		UL	UBH3R1121BGE
		Center	Top/bottom	#6-250MCM line #8-2/0 load	(1) #14-2	Y	4	N	N	Small hub opening		UL, CMP	UT3R1121BGE
		Center	Top/bottom	#6-250MCM line #8-2/0 load	(1) #14-2	Y	4	N	N	Large hub cover plate		UL, MEG	UTZ3R1121CFLGE
	4	Center	Top/bottom	#6-250MCM line #8-2/0 load	(1) #14-2	Y	4	N	N	Small hub opening		UL, CMP	UT4R1121BGE
		Center	Top/bottom	#6-250MCM line #8-2/0 load	(1) #14-1/0	Y	4	N	N	Large hub cover plate		UL, MEG	UTZ4R1121CFLGE
	5	Center	Top/bottom	#6-250MCM line #8-2/0 load	(1) #14-2	Y	4	N	N	Small hub opening		UL, CMP	UT5R1121BGE
		Center	Top/bottom	#6-250MCM line #8-2/0 load	(1) #14-2/0	Y	4	N	N	(2) Large hub cover plates		UL, MEG	UTZ5R1121CFLGE
	6	Center	Top/bottom	#6-350MCM line #8-2/0 load	(1) #14-2	Y	4	N	N	Small hub opening		UL, CMP	UT6R1131BGE
		Center	Top/bottom	#6-250MCM line #8-2/0 load	(1) #14-2/0	Y	4	N	N	(2) Large hub cover plates		UL, MEG	UTZ6R1131CFLGE
150	2	Center	Top/bottom	#6-350MCM line #8-250MCM load	No ground	N	5	N	N	Small hub cover plate		UL, KCP&L	UG2R5332CKCGE
		Center	Top/bottom	#6-350MCM line #8-250MCM load	(1) #14-2	Y	4	N	N	Small hub opening		UL	UT2R5332BGE
	3	End	Top/bottom	#6-350MCM line #8-250MCM load	(1) #14-2	Y	4	N	N	(1) Small hub opening (1) Small hub cover plate		UL	UT3R5632BGE
	4	End	Top/bottom	#6-350MCM line #8-250MCM load	(1) #14-2	Y	4	N	N	(1) Small hub opening (1) Small hub cover plate		UL	UT4R5632BGE

(continued on next page)

Horizontal metering

Single phase, ringless

Amp	Gang	Feed type	Overhead/ underground line feed	Line wire range	Ground lug size	Triplex ground	No. of terminals	Lever bypass	Horned bypass	Hub type	Enclosure N3R	UL & utility approved	Ordering code
200	2	Center	Top/bottom	3/8" STUDS #8-250MCM line load	No ground	N	4	N	N	Large hub cover plate	G90 steel	UL, DTE	1006737BGE
		Center	Top/bottom	#6-350MCM line #8-250MCM load	No ground	N	4	N	N	Large hub cover plate		UL	U2R2332UGE
		Center	Top/bottom	#6-350MCM line #8-250MCM load	No ground	N	4	N	Y	Large hub opening		UL	UBH2R2332TGE
		Center	Top/bottom	#8-350MCM line #8-250MCM load	(1) #14-2	Y	4	N	Y	Large hub opening		UL, AEP	UFHT2R2332TGE
		Center	Top/bottom	#6-350MCM line #8-250MCM load	(1) #14-2	Y	4	N	Y	Large hub opening		UL	UHT2R2332TGE
		Center	Top/bottom	#6-350MCM line #8-250MCM load	(1) #14-2	Y	4	N	N	Large hub opening		UL, CMP	UT2R2332TGE
		Center	Top/bottom	#6-350MCM line #8-250MCM load	(1) #14-2	Y	4	N	N	Large hub cover plate		UL, SCE&G	UT2R2332UGE
		Center	Top/bottom	#6-250MCM line #8-2/0 load	(1) #14-2	Y	4	N	N	Small hub cover plate		UL, MEG	UT2R2332UFLGE
	3	Center	Top/bottom	#6-350MCM line #8-250MCM load	No ground	N	4	N	Y	Large hub opening		UL	UBH3R2332TGE
		Center	Top/bottom	#6-350MCM line #8-250MCM load	(1) #14-2	Y	4	N	Y	Large hub opening		UL, AEP	UFHT3R2332TGE
		Center	Top/bottom	#6-350MCM line #8-250MCM load	(1) #14-2	Y	4	N	Y	Large hub opening		UL	UHT3R2332TGE
		Center	Top/bottom	#6-350MCM line #8-250MCM load	(1) #14-2	Y	4	N	N	Large hub opening		UL, CMP	UT3R2332TGE
		Center	Top/bottom	#6-350MCM line #8-250MCM load	(1) #14-2	Y	4	N	N	Large hub cover plate		UL, SCE&G	UT3R2232UGE
		Center	Top/bottom	#6-250MCM line #8-2/0 load	(1) #14-2	Y	4	N	N	Small hub cover plate		UL, MEG	UT3R2332UFLGE
	4	Center	Top/bottom	1/0-500MCM line #8-250MCM load	(1) #14-1/0	Y	4	N	Y	Large hub opening		UL, AEP	UFHT4R2352TGE
		Center	Top/bottom	1/0-500MCM line #8-250MCM load	(1) #14-2	Y	4	N	Y	Large hub opening		UL	UHT4R2352TGE
		Center	Top/bottom	1/0-500MCM line #8-250MCM load	(1) #14-1/0	Y	4	N	N	Large hub opening		UL, CMP	UT4R2352TGE
		Center	Top/bottom	1/0-500MCM line #8-250MCM load	(1) #14-1/0	Y	4	N	N	Large hub cover plate		UL, SCE&G	UT4R2352UGE
		Center	Top/bottom	#6-250MCM line #8-2/0 load	(1) #14-2	Y	4	N	N	Small hub cover plate		UL, MEG	UT4R2352UFLGE
	5	Center	Top/bottom	1/0-500MCM line #8-250MCM load	(1) #14-2/0	Y	4	N	N	(2) Large hub cover plates		UL	GEKR5CS1ET
		Center	Top/bottom	1/0-500MCM line #8-250MCM load	(1) #14-2/0	Y	4	N	Y	(2) Large hub openings		UL, AEP	UFHT5R2392TTGE
		Center	Top/bottom	1/0-500MCM line #8-250MCM load	(1) #14-2/0	Y	4	N	N	(2) Large hub openings		UL, CMP	UT5R2392TTGE
		Center	Top/bottom	#6-250MCM line #8-2/0 load	(1) #14-2	Y	4	N	N	Small hub cover plate		UL, MEG	UT5R2392UFLGE
	6	Center	Top/bottom	1/0-500MCM line #8-250MCM load	(1) #14-2/0	Y	4	N	N	(2) Large hub cover plates		UL	GEKR6CS1ET
		Center	Top/bottom	1/0-500MCM line #8-250MCM load	(1) #14-2/0	Y	4	N	Y	(2) Large hub openings		UL, AEP	UFHT6R2392TTGE
		Center	Top/bottom	1/0-500MCM line #8-250MCM load	(1) #14-2/0	Y	4	N	Y	(2) Large hub openings		UL	UHT6R2392TTGE
		Center	Top/bottom	1/0-500MCM line #8-250MCM load	(1) #14-2/0	Y	4	N	N	(2) Large hub openings		UL, CMP	UT6R2392TTGE
		Center	Top/bottom	#6-350MCM line #8-2/0 load	(1) #14-2	Y	4	N	N	Small hub cover plate		UL, MEG	UT6R2392UFLGE

Modular metering circuit breakers

Table of contents

Modular metering circuit breakers	
Tenant main breakers for 125A, 2 pole sockets	2-34
Tenant main breakers for 200A, 2 pole sockets	2-34
Tenant main circuit breakers for 225A, 2 pole sockets	2-35
Tenant main circuit breakers for 200A/225A, 2 pole sockets	2-35
Tenant main circuit breakers for 200A/225A, 3 pole sockets	2-36

Modular metering circuit breakers



THQL, THHQL



TMQL



TQD, THQD

Tenant main breakers for 125A, 2 pole sockets

Amps	Interrupting current rating (kAIC)	Wire size	Ordering code
60	10	(1) #8-#3 CU; #8-#3AL	THQL2160
	22	(1) #8-#3 CU; #8-#3AL	THHQL2160
	42	#8-#1 (Cu) or #8-1/0 (Al)	TMQL2160
	65	#8-2/0	TMQA2160
70	10	(1) #6-1/0 CU; #4-#1/0 AL	THQL2170
	22	(1) #6-1/0 CU; #4-#1/0 AL	THHQL2170
	42	#8-#1 (Cu) or #8-1/0 (Al)	TMQL2170
	65	#8-2/0	TMQA2170
80	10	(1) #6-1/0 CU; #4-#1/0 AL	THQL2180
	22	(1) #6-1/0 CU; #4-#1/0 AL	THHQL2180
	42	#8-#1 (Cu) or #8-1/0 (Al)	TMQL2180
	65	#8-2/0	TMQA2180
90	10	(1) #6-1/0 CU; #4-#1/0 AL	THQL2190
	22	(1) #6-1/0 CU; #4-#1/0 AL	THHQL2190
	42	#8-#1 (Cu) or #8-1/0 (Al)	TMQL2190
	65	#8-2/0	TMQA2190
100	10	(1) #6-1/0 CU; #4-#1/0 AL	THQL21100
	22	(1) #6-1/0 CU; #4-#1/0 AL	THHQL21100
	42	#8-#1 (Cu) or #8-1/0 (Al)	TMQL21100
	65	#8-2/0	TMQA2100
110	10	-	THQL21110
	22	-	THHQL21110
	42	-	-
	65	#8-2/0	TMQA2110
125	10	(1) #2-2/0 CU; #2-2/0 AL	THQL21125
	10	-	TMQL21125SF ¹
	22	(1) #2-2/0 CU; #2-2/0 AL	THHQL21125
	42	2/0 - #14	TMQL21125
	65	#8-2/0	TMQA2125

¹Sub-Feed lug. No overcurrent protection.

Tenant main breakers for 200A, 2 pole sockets

Amps	Interrupting current rating (kAIC)	Wire size	Ordering code
60	42	#6-4/0	TMQC22060MM
	65	#6-4/0	TMQF22060MM
	100	#6-4/0	TMQV22060MM
70	42	#6-4/0	TMQC22070MM
	65	#6-4/0	TMQF22070MM
	100	#6-4/0	TMQV22070MM
80	42	#6-4/0	TMQC22080MM
	65	#6-4/0	TMQF22080MM
	100	#6-4/0	TMQV22080MM
90	42	#6-4/0	TMQC22090MM
	65	#6-4/0	TMQF22090MM
	100	#6-4/0	TMQV22090MM
100	10	(1) #1-300 CU; #1-300 AL	TQD22100
	22	(1) #1-300 CU; #1-300 AL	THQD22100
	42	#6-4/0	TMQC22100MM
	65	#6-4/0	TMQF22100MM
	100	#6-4/0	TMQV22100MM
110	42	#6-4/0	TMQC22110MM
	65	#6-4/0	TMQF22110MM
	100	#6-4/0	TMQV22110MM
	100	#6-4/0	TMQV22110MM
125	10	(1) #1-300 CU; #1-300 AL	TQD22125
	22	(1) #1-300 CU; #1-300 AL	THQD22125
	42	#6-4/0	TMQC22125MM
	65	#6-4/0	TMQF22125MM
	100	#6-4/0	TMQV22125MM
150	10	(1) #1-300 CU; #1-300 AL	TQD22150
	22	(1) #1-300 CU; #1-300 AL	See TMQC Frame
	42	#6-4/0	TMQC22150MM
	65	#6-4/0	TMQF22150MM
	100	#6-4/0	TMQV22150MM
175	10	(1) #1-300 CU; #1-300 AL	TQD22175
	22	(1) #1-300 CU; #1-300 AL	THQD22175
	42	#6-4/0	TMQC22175MM
	65	#6-4/0	TMQF22175MM
	100	#6-4/0	TMQV22175MM
200	10	(1) #1-300 CU; #1-300 AL	See TMQC Frame
	42	#6-4/0	TMQC22000MM
	65	#6-4/0	TMQF22000MM
	100	#6-4/0	TMQV22000MM

²For 60A-200A 2P breakers use TMQV225L2 to get 300MCM terminals.

Modular metering circuit breakers

Tenant main circuit breakers for 225A, 2 pole sockets

Amps	Interrupting current rating (kAIC)	Wire size	Ordering code
15	10	(1) #14-3 CU; #12-1 AL	TEB122015
20	10	(1) #14-3 CU; #12-1 AL	TEB122020
25	10	(1) #14-3 CU; #12-1 AL	TEB122025
30	10	(1) #14-3 CU; #12-1 AL	TEB122030
35	10	(1) #14-3 CU; #12-1 AL	TEB122035
40	10	(1) #14-3 CU; #12-1 AL	TEB122040
45	10	(1) #14-3 CU; #12-1 AL	TEB122045
50	10	(1) #14-3 CU; #12-1 AL	TEB122050
60	10	(1) #14-3 CU; #12-1 AL	TEB122060
70	10	(1) #6/20 CU; #4-2/0 AL	TEB122070
80	10	(1) #6/20 CU; #4-2/0 AL	TEB122080
90	10	(1) #6/20 CU; #4-2/0 AL	TEB122090
100	10	(1) #1-300 CU; #1-300 AL	TQD22100
	22	(1) #1-300 CU; #1-300 AL	THQD22100
125	10	(1) #1-300 CU; #1-300 AL	TQD22125
	22	(1) #1-300 CU; #1-300 AL	THQD22125
150	10	(1) #1-300 CU; #1-300 AL	See TMQC Frame
	22	(1) #1-300 CU; #1-300 AL	See TMQC Frame
175	10	(1) #1-300 CU; #1-300 AL	TQD22175
	22	(1) #1-300 CU; #1-300 AL	See TMQC Frame
200	10	(1) #1-300 CU; #1-300 AL	See TMQC Frame
225	10	(1) #1-300 CU; #1-300 AL	Use TMQV
	22	(1) #1-300 CU; #1-300 AL	Use TMQV

Tenant main circuit breakers for 200A/225A, 2 pole sockets

Amps	Interrupting current rating (kAIC)	Wire size	Ordering code
60	42	#6-4/0	TMQC22060MM
	65	#6-4/0	TMQF22060MM
	100	#6-4/0	TMQV22060MM
70	42	#6-4/0	TMQC22070MM
	65	#6-4/0	TMQF22070MM
	100	#6-4/0	TMQV22070MM
80	42	#6-4/0	TMQC22080MM
	65	#6-4/0	TMQF22080MM
	100	#6-4/0	TMQV22080MM
90	42	#6-4/0	TMQC22090MM
	65	#6-4/0	TMQF22090MM
	100	#6-4/0	TMQV22090MM
100	42	#6-4/0	TMQC22100MM
	65	#6-4/0	TMQF22100MM
	100	#6-4/0	TMQV22100MM
110	42	#6-4/0	TMQC22110MM
	65	#6-4/0	TMQF22110MM
	100	#6-4/0	TMQV22110MM
125	42	#6-4/0	TMQC22125MM
	65	#6-4/0	TMQF22125MM
	100	#6-4/0	TMQV22125MM
150	42	#6-4/0	TMQC22150MM
	65	#6-4/0	TMQF22150MM
	100	#6-4/0	TMQV22150MM
175	42	#6-4/0	TMQC22175MM
	65	#6-4/0	TMQF22175MM
	100	#6-4/0	TMQV22175MM
200	42	#6-4/0	TMQC22200MM
	65	#6-4/0	TMQF22200MM
	100	#6-4/0	TMQV22200MM
225	42	#6-4/0	TMQC22225MM
	65	#6-4/0	TMQF22225MM
	100	#6-4/0	TMQV22225MM

¹For 60A-200A 2P breakers use TMQV225L2 to get 300MCM terminals.

Modular metering circuit breakers

Tenant main breakers for 200A/225A, 3 pole sockets			
Amps	Interrupting current rating (kAIC)	Wire size	Ordering code
15	10	(1) #14-3 CU; #12-1 AL	TEB132015
20	10	(1) #14-3 CU; #12-1 AL	TEB132020
25	10	(1) #14-3 CU; #12-1 AL	TEB132025
30	10	(1) #14-3 CU; #12-1 AL	TEB132030
35	10	(1) #14-3 CU; #12-1 AL	TEB132035
40	10	(1) #14-3 CU; #12-1 AL	TEB132040
45	10	(1) #14-3 CU; #12-1 AL	TEB132045
50	10	(1) #14-3 CU; #12-1 AL	TEB132050
60	10	(1) #14-3 CU; #12-1 AL	TEB132060
	42	#6-4/0	TMQC32060
	65	#6-4/0	TMQF32060
	100	#6-4/0	TMQV32060
70	10	(1) #6/20 CU; #4-2/0 AL	TEB132070
	42	#6-4/0	TMQC32070
	65	#6-4/0	TMQF32070
	100	#6-4/0	TMQV32070
80	10	(1) #6/20 CU; #4-2/0 AL	TEB132080
	42	#6-4/0	TMQC32080
	65	#6-4/0	TMQF32080
	100	#6-4/0	TMQV32080
90	10	(1) #6/20 CU; #4-2/0 AL	TEB132090
	42	#6-4/0	TMQC32090
	65	#6-4/0	TMQF32090
	100	#6-4/0	TMQV32090
100	10	(1) #3-3/0 CU; #1-3/0 AL	TEB132100
	22	(1) #1-300 CU; #1-300 AL	THQD32100
	42	#6-4/0	TMQC32100
	65	#6-4/0	TMQF32100
	100	#6-4/0	TMQV32100
110	42	#6-4/0	TMQC32110
	65	#6-4/0	TMQF32110
	100	#6-4/0	TMQV32110
125	10	(1) #1-300 CU; #1-300 AL	TQD32125
	22	(1) #1-300 CU; #1-300 AL	THQD32125
	42	#6-4/0	TMQC32125
	65	#6-4/0	TMQF32125
	100	#6-4/0	TMQV32125
150	10	(1) #1-300 CU; #1-300 AL	TQD32150
	22	(1) #1-300 CU; #1-300 AL	THQD32150
	42	#6-4/0	TMQC32150
	65	#6-4/0	TMQF32150
	100	#6-4/0	TMQV32150
175	10	(1) #1-300 CU; #1-300 AL	TQD32175
	22	(1) #1-300 CU; #1-300 AL	THQD32175
	42	#6-4/0	TMQC32175
	65	#6-4/0	TMQF32175
	100	#6-4/0	TMQV32175
200	10	(1) #1-300 CU; #1-300 AL	TQD32200
	22	(1) #1-300 CU; #1-300 AL	THQD32200
	42	#6-4/0	TMQC32200
	65	#6-4/0	TMQF32200
	100	#6-4/0	TMQV32200
225	10	–	Use TMQC
	22	–	Use TMQC
	42	#6-4/0	TMQC32225
	65	#6-4/0	TMQF32225
	100	#6-4/0	TMQV32225

¹For 60A-200A 2P breakers use TMQV225L2 to get 300MCM terminals.

Modular metering factory installed accessories

Table of contents

Modular metering factory installed accessories	
Lug kits	2-38
Optional lug kits and optional compression lug kits	2-38
Factory installed lug kits	2-39
Optional lug kit	2-39

Modular metering factory installed accessories

Lug kits

Amp rating	Ring-type socket (4 jaw socket standard)	Ringless socket (5th jaw socket standard)	Mini Mod III	Phase wire size	Neutral wire size	Lugs per kit	Ordering code
			Ringless socket MEG approved (5th jaw socket standard)				
125	TMM2212R	TMMR2212R	TMMR2212RF	6-300	6-300	–	–
	TMM4312R	TMMR4312R	TMMR4312RF	(1) 2/0-600 or (2) 6-250	(1) 2/0-600 or (2) 6-250	1 lug/kit; 1 lug/phase; 2 hole lug	TMMLK1
	TMM4412R	TMMR4412R	TMMR4412RF				
	TMM6512R	TMMR6512R	TMMR6512RF	(2) 250-500/lug	(2) 250-500/lug	1 lug/kit; 1 lug/phase	TMPAL30
	TMM6612R	TMMR6612R	TMMR6612RF				
200	TMM4220R	TMMR4220R	TMMR4220RF	(2) 250-500/lug	(2) 250-500/lug	1 lug/kit; 1 lug/phase	TMPAL30
	TMM6320R	TMMR6320R	TMMR6320RF				
	TMM6420R	TMMR6420R	TMMR6420RF				
	TMM6520R	TMMR6520R	TMMR6520RF				
	TMM6620R	TMMR6620R	TMMR6620RF				

Optional lug kits and optional compression lug kits

Amp rating	Ring-type socket (4 jaw socket standard)	Ringless socket (5th jaw socket standard)	Mini Mod III	Phase wire size	Mechanical lug kit ordering code	Compression lug kit ordering code	Lugs per kit
			Ringless socket MEG approved (5th jaw socket standard)				
125	TMM4312R	TMMR4312R	TMMR4312RF	(3) 4-300	TMPAL40	TMM6CLL	2 studs/phase, double stack for up to 2 conductors per phase, kit includes 3 lug landing pads (1 kit/device)
				(2) 250-500 / lug	TMPAL30	–	
	TMM4412R	TMMR4412R	TMMR4412RF	(3) 4-300	TMPAL40	TMM6CLL	
				(2) 250-500 / lug	TMPAL30	–	
	TMM6512R	TMMR6512R	TMMR6512RF	(3) 4-300	TMPAL40	TMM6CLL	
				(1) 2/0-600 or (2) 6-250	TMMLK1	–	
	TMM6612R	TMMR6612R	TMMR6612RF	(3) 4-300	TMPAL40	TMM6CLL	
				(1) 2/0-600 or (2) 6-250	TMMLK1	–	
	TMM4220R	TMMR4220R	TMMR4220RF	(3) 4-300	TMPAL40	TMM6CLL	
				(1) 2/0-600 or (2) 6-250	TMMLK1	–	
200	TMM6320R	TMMR6320R	TMMR6320RF	(3) 4-300	TMPAL40	TMM6CLL	
				(1) 2/0-600 or (2) 6-250	TMMLK1	–	
	TMM6420R	TMMR6420R	TMMR6420RF	(3) 4-300	TMPAL40	TMM6CLL	
				(1) 2/0-600 or (2) 6-250	TMMLK1	–	
	TMM6520R	TMMR6520R	TMMR6520RF	(3) 4-300	TMPAL40	TMM6CLL	
				(1) 2/0-600 or (2) 6-250	TMMLK1	–	
	TMM6620R	TMMR6620R	TMMR6620RF	(3) 4-300	TMPAL40	TMM6CLL	
				(1) 2/0-600 or (2) 6-250	TMMLK1	–	
				(3) 4-300	TMPAL40	TMM6CLL	
				(1) 2/0-600 or (2) 6-250	TMMLK1	–	

Modular metering factory installed accessories

Factory installed lug kits

Amp rating	Main breaker	Phase wire size	Neutral wire size	Lugs per kit	Total lugs per device	Ordering code
400	TMP5B4R	AL/CU: (2) 2/0-500 or (1) 8-600	AL/CU: (2) 2-600	2	–	TCLK265
	TMP5HB4R			3		TCLK365
	TMP3SB4R					
	TMP3SHB4R					
600	TMP3SB6R	AL/CU: (2) 2/0-500 or (1) 8-600	AL/CU: (2) 2-600	3	–	TCLK365
800	TMP5B8R	AL/CU: (3) 3/0-500	AL/CU: (4) 250-500	1	–	TCAL81 ¹
	TMP3SB8R					
1000	TMP5B10R	AL: (4) 250-500	AL/CU: (4) 250-500	1	–	TCAL125 ²
	TMP3SB10R					
1200	TMP5B12R	AL: (4) 250-500	AL/CU: (4) 250-500	1	–	TCAL125 ²
	TMP3SB12R					
1400	TMPBB14R, TMPBB14RAR	AL/CU: (4) 500-1000	AL/CU: (4) 500-1000	1 lug/kit, 4 holes/lug	3	TMPL1600RD
	TMP3BB14R, TMP3BB14RAR				4	
	TMP3BT14R, TMP3BT14RAR					
1600	TMPBB16R, TMPBB16RAR	AL/CU: (4) 500-1000	AL/CU: (4) 500-1000	1 lug/kit, 4 holes/lug	3	TMPL1600RD
	TMPBB16RST					
	TMPBT16R, TMPBT16RAR					
	TMPBT16RST					
	TMP3BBT16RST					
	TMP3BB16R, TMP3BB16RAR					
	TMP3BT16R, TMP3BT16RAR					
	TMP3BT16RST					
2000	TMPBB20R, TMPBB20RAR	AL/CU: (6) #2-600	AL/CU: (6) #2-600	9	6 lugs/device; 3 lugs/neutral	TMPL2000RD
	TMPBT20R				9 lugs/device; 3 lugs/neutral	
	TMP3BB20R, TMP3BB20RAR					
	TMP3BT20R, TMP3BT20RAR					

¹Lug kits TCALK281 (for TMP5B8R) and TCALK381 (TMP3SB8R) can also be used instead of the TCAL81 lugs

²Lug kits TCALK2125 (for TMP5B10R and TMP5B12R) and TCALK3125 (for TMP3SB10R and TMP3SB12R) can also be used instead of TCAL125 lug

Optional lug kit

Amp rating	Main breaker	Phase wire size	Phase ordering code	Lugs per kit	Neutral product number	Neutral wire size
1000	TMP5B10R	AL/CU: (3) 350-750	TCAL124 ³	2	1	–
	TMP3SB10R			3		
1200	TMP5B12R	AL/CU: (3) 350-750	TCAL124 ³	2	1	–
	TMP3SB12R			3		
1400	TMPBB14R	(6) #2-600	TMPL2000RD	9	TMBP2000N	(6) #2-600
	TMP3BB14R					
	TMP3BT14R					
1600	TMPBB16R	(6) #2-600	TMPL2000RD	9	TMBP2000N	(6) #2-600
	TMP3BB16R					
	TMPBB16RST					
	TMP3BB16RST					
	TMPBT16R					
	TMP3BT16R					
	TMPBT16RST					
	TMP3BT16RST					

³Lug kits TCALK2124 (for TMP5B10R and TMP5B12R) and TCALK3124 (for TMP3SB10R and TMP3SB12R) can also be used instead of TCAL124 lugs

Modular metering factory installed accessories

Factory installed lug kits

Amp rating	Main breaker	Ordering code	Phase wire size	Neutral wire size	Lugs per kit	
400	TMPFB4R	-	Al/Cu: (1) 1/0-750 or (2) 1/0-300	Al/Cu: (1) 1/0-750 or (2) 1/0-300	-	
	TMPFT4R					
	TMP3FB4R					
	TMP3FT4R					
400	TMPFB4RCLL	-	Accepts compression lugs, 1 landing/phase	-	-	
	TMP3FB4RCLL					
600	TMPFB6R	-	Al/Cu: (2) 2-600	Al/Cu: (2) 2-600	-	
	TMPFT6R					
	TMP3FB6R					
	TMP3FT6R					
600	TMPFB6RCLL	-	Accepts compression lugs, 2 landings/phase	-	-	
	TMP3FB6RCLL					
800	TMPFB8R	TMPL40	Al/Cu: (4) 3/0-750	Al/Cu: (4) 3/0-750	1 lug/kit, 4 holes/lug	
	TMPFT8R					
	TMP3FB8R					
	TMP3FT8R					
800	TMPFB8RCLL	-	Accepts compression lugs, 2 landings/phase	-	-	
	TMP3FB8RCLL					
1200	TMPFB12R	-	Al/Cu: (4) 2-500	Al/Cu: (4) 2-500	-	
	TMPFB12RT		Al/Cu: (4) 2-600, 2 lugs/phase	Al/Cu: (4) 2-600		
	TMPFT12R		Al/Cu: (4) 2-600	Al/Cu: (4) 2-500		
	TMP3FB12R		Al/Cu: (8) 2-600 (4 lugs, 2 holes/lug)	-		
	TMP3FB12RT		Al/Cu: (4) 2-600, 2 lugs/phase	Al/Cu: (4) 2-600		
	TMP3FT12R		Accepts compression lugs, 3 landings/phase	-		
	TMPFB12RCLL					
	TMP3FB12RCLL					
1600	TMP3FB16R	-	Al/Cu: (8) 2-600	Al/Cu: (8) 2-600	-	
	TMP3FB16RST		Al/Cu: (8) 2-600	Al/Cu: (8) 2-600		
	TMP3FT16R		Al/Cu: (5) 4-600	Al/Cu: (5) 4-600		
2000	TMP3FB20R	-	Al/Cu: (8) 2-600	Al/Cu: (8) 2-600	-	
	TMP3FB20RST		Al/Cu: (8) 2-600	Al/Cu: (8) 2-600		
	TMP3FT20R		Al/Cu: (6) 4-600	Al/Cu: (6) 4-600		

Optional lug kit

Amp rating	Main breaker	Ordering code	Phase wire size	Lugs per kit	Neutral ordering code
400	TMPFT4R	TMPL40	Al/Cu: (4) 3/0-750; 4 cables/lug	TMP3F8CLL1	Compression
	TMP3FT4R				
	TMPFB4R				
	TMP3FB4R				
600	TMPFB6R	TMPL40	Al/Cu: (4) 3/0-750; 4 cables/lug	TMP3F8CLL1	Compression
	TMPFT6R				
	TMP3FB6R				
	TMP3FT6R				
800	TMPFB8R	-	-	TMP3F8CLL1	Compression
	TMPFT8R				
	TMP3FB8R				
	TMP3FT8R				

Modular metering factory installed accessories

Factory installed lug kits

Amp rating	Main lug (terminal box)	Phase wire size	Neutral wire size	Lugs per kit	Total lugs per device	Lug kit ordering code
400	TMP3L4R	AL/CU: (1) 2/0-600 or (2) #6-250	AL/CU: (1) 2/0-600 or (2) #6-250	1 lug/kit, 1 lug/phase, 2 hole lug	–	TMMLK1 (w/instr.)
600	TMP3L6R	AL/CU: (2) 250-500/lug	AL/CU: (2) 250-500/lug	1 lug/kit, 1 lug/phase	–	TMPAL30
800	TMPL8R	AL/CU: (2) 1/0-750 or (4) 1/0-300	AL/CU: (2) 1/0-750 or (4) 1/0-300	2 lugs/phase, 3 lugs/kit	–	TMPL750
	TMP3L8R					
1200	TMPL12R	AL/CU: (3) 1/0-750 or (6) 1/0-300	AL/CU: (3) 1/0-750 or (6) 1/0-300	3 lugs/phase, 3 lugs/kit	–	TMPL750
	TMP3L12R, TMP3L12RCRIS					
1600	TMPL16R	AL/CU: (6) 250-500	AL/CU: (6) 250-500	1 lug/kit, 3 lugs/phase	9 lugs total	TMPAL30
	TMP3L16R, TMP3L16RCRIS				12 lugs total	
2000	TMP3L20R, TMP3L20RCRIS	AL/CU: (8) 1/0-750	AL/CU: (8) 1/0-750	1 lug/kit, 3 lugs/phase	12 lugs total	–
	TMPL20R, TMPL20RCRIS					

Optional lug kit


Amp rating	Main lug (terminal box)	Phase wire size	Lugs per kit	Compression lug kit ordering code	Lugs per kit	Phase lug kit ordering code
400	TMP3L4R	Al/Cu: (2) 250-500/lug	1 lug/kit, 1 lug/phase	TMP36LCLL	2 studs per phase, double stack for up to 2 conductors per phase	TMPAL30
600	TMP3L6R	–	–			–
800	TMPL8R	Al/Cu: (2) 250-500	1 lug/kit, 1 lug/phase	TMP3L12CLL1	4 studs per phase, double stack for up to 4 conductors per phase	TMPAL30
	TMP3L8R					
1200	TMPL12R					
	TMP3L12R					
1600	TMPL16R	Al/Cu: (4) 1/0-750 or (8) 1/0-300	1 kit/device, 4 connector assy's w/4 lugs each (16 total lugs), 1 assy/phase	TMP3L16CLL1	–	TMP3L16BLK
	TMP3L16R					

Modular metering field installed accessories

Table of contents

Modular metering field installed accessories	
Kits	2-43
Meter socket covers	2-44
Sealing rings	2-44
Lug kits	2-44
Surge protective devices	2-44
Hub kits	2-45
Hub cover plates	2-45
Rating plugs	2-45

Modular metering field installed accessories



TMBPM12TA



TMBPC20



TMBPJ20



TMM12SF2



TMM20SF4

Kits		
Description		Ordering code
By-pass kits		
Manual slider-type (ring type only)	125 amp top socket for 2, 3, 5 and 6 gang	TMBPM12TA ²
	125 amp for all other sockets	TMBPM12A ²
	200 amp for all sockets	TMBPM20A ²
Jumper straps type (use with TMCA)		TMBPJ20 ³
Cover including jumper strap type-fits all (ring type only)		TMBPC20 ¹
Horn-type-fits all (ringless only) ¹		TMBPH20A ³
Horn with metal meter guides		TMBPHG
Totalizing jumper type bypass kit		TMBPT320
Semi-flush kits		
125 Sockets	2 gang	TMM12SF2
	3 and 4 gang	TMM12SF4
	5 and 6 gang	TMM12SF6
200 Sockets	2 gang	TMM20SF2
	3 and 4 gang	TMM20SF4
	5 and 6 gang	TMM20SF6
Fifth jaw kits		
Bused; 3, 6, or 9 o'clock mounting: Order two for fifth and sixth jaw. Not suitable for 2-gang ring type		TM5JA
Isolated; 3 or 9 o'clock mounting		TM5JUA
Compression lug landing kit		
600 amp		TMM6CLL

¹100 amps continuous.

²For top socket on TMM4220R, order TMBPM20TA.

³200 amps continuous.


Includes 3 pads each with 2 threaded stud connections (and hardware) for compression or mechanical lugs with NEMA 2-hole bolt configuration (lugs not furnished). Not suitable for 2-gang.

Kits	
Type	Ordering code
TEB breaker mounting kit	TMTEB
Barrel lock bracket and guard kit	TMBL ⁶
Blank meter socket cover (fits all positions)	TMCB322A
Individual meter socket barrier kit (includes 6)	TMBR3
Insulator for lever by-pass handle	TMHN
Replacement phase balancing jumper kit	TMPJ31 ⁶


Modular metering field installed accessories



TMCB12B




TMRPM12TA



TSR1




TSR3



TSR4

TSR5



TMCA

TMCP



TMBR



TMPAL40



TMZR

Description		Ordering code
Steel meter socket covers		
Blank (fits bottom position only)	125 Amp	TMCB12B
	200 Amp	TMCB20B
	Fits all positions	TMCB322A
Ringless (Field -converts ring-type to ringless)	125 amp top socket for 2 and 3 gang	TMCR12T
	125 amp for all other sockets	TMCR12
	200 amp for all sockets	TMCR20
Sealing rings		
Screw-type, aluminum		TSR1
Snap type, stainless steel		TSR3
Screw and lock-type, aluminum		TSR4
Snap-type, aluminum (standard)		TSR5

Description		Ordering code
Miscellaneous		
Lexan meter socket cover plate (without tabs)		TMCA
Lexan meter socket cover plate		TMCP
Equipment ground bar, (6) 6-2/0		TMEG
Individual meter socket barrier kit (includes 6)		TMBR
Mounting Z-rail, 4-foot		TMZR
Lug kit for (3) 4/0 cable		TMPAL40
Main lug kit, (1) #6-600 or (2) 2/0-250		TMMLK1
Spacer	4-inch, 4 cross bus rated 1200A	TMPSP12
Elbow	16 inch x 16 inch, 4 cross bus rated 1200A 3PH N1	TMPE12
Elbow	12 inch x 12 inch, 4 cross bus rated 1200A 3PH N1	TMPE12A
Elbow	12 inch x 12 inch, 4 cross bus rated 1200A 3PH N3R	TMPE12AR4
320A Socket	Insert clip into the upper right hand jaw of the 320A meter socket to prevent a 200A meter from being inserted into a 320A meter socket.	TMIC
Anti-inversion clip		
Endwall		TM234BEW200
Endwall		TM56BEW200
TQD mounting kit	TQD breaker mounting kit - This is a replacement part. Units come with this part factory installed.	TMTQD3
Mod Meter-2-hole lug kit -1 400-2000A for Dominion Virginia Power		717RD06G01
Mounting kit -Meter Mod III-residential units		99-4172-2
Bounding strap kit - Except CECHA 3/4 socket		MTRPKBNDRSTRP
NEMA 1 painted top endwall with knockouts 125A meter stacks		TM12N1WLK
NEMA 1 painted top endwall with knockouts 200A meter stacks		TM20N1WLK
Neutral kit, 1600A and 2000A main breaker		TMBP2000N
Compression lug landing kit-600A		TMM6CLL
Phase balance kit - replaces 99-4177-3		35MMPHBALKIT
Ground lug kit - (1) 1/0-750 or (2) 1/0-300		80-6217-2
Surge protective devices		
SPD 100KA/PH 1P3W 120/240V (25.55"h x 18.30"w x 11.38"d)		TMP1SURGE
SPD 100KA/PH 3P4W 208Y/120V (25.55"h x 18.30"w x 11.38"d)		TMP3SURGE

¹Not UL Listed.


²200 amps continuous.³100 amps continuous.

⁴ Not UL Listed

Modular metering field installed accessories



ARP00035GE



ARP000920GE



Small Hub



Large Hub

Accessories	
Description	Ordering code
5th terminal kit H4330 parts	ARP00326GE
Connector kit (2) 350MCM-#6 lever bypass	ARP00427GE
HQ bolt shield	ARP01595GE
Anti-inversion clip (10 per package)	ARP00984GE
GE connector kit #4-600MCM	ARP00129GE
DTE auxillary service kit	ARP01590GE
5th jaw	ARP00035GE
Auxillary contacts enclosure G90	1006630AGE
GE plastic meter socket cover plate	ARP00920GE
GE single socket 600MCM lug kit	ARP00118GE
Single socket 600MCM or (2) 250MCM lug kit	ARP00429GE

Hub kits	
Description	Ordering code
1" Hub kit, small	ARP00003GE
1.25" Hub kit, small	ARP00004GE
1.5" Hub kit, small	ARP00005GE
2" Hub kit, small	ARP00006GE
2.5" Hub kit, small	ARP00007GE
2" Hub kit, large	ARP00017GE
2.5" Hub kit, large	ARP00018GE
3" Hub kit, large	ARP00019GE
3.5" Hub kit, large	ARP00020GE
4" Hub kit, large	ARP00021GE

Hub cover plates	
Description	Ordering code
Small hub cover plate for 3 5/16" hub openings - steel	ARP00002GE
Small hub cover plate for 3 5/16" hub openings - aluminum	ARP00008GE
Large hub cover plate for 5" hub openings - steel	ARP00016GE
Large hub cover plate for 5" hub openings - aluminum	ARP00023GE

Main breaker modules alternate rating plugs		
Breaker frame rating (amps)	Trip rating (amps)	Rating plug ordering code
400A	250	SRPG400A250
	300	SRPG400A300
1200	1175	SRPK1200A1175